MURPHY'S
Blue Print Manual

MURPHY'S
Blue Print Manual

THIS MANUAL is dedicated to the service of helping Apartment Designers, Builders and Owners to a clearer understanding of the economic value of Murphy Beds from an investment standpoint.

It details and illustrates in workable blue-prints practical applications of the latest and best ways of reducing floor space in planning—of reducing furniture investment—and points out tried and successful ways of installing Murphy Beds to best advantage.

An experienced Technical Service Department is maintained for the benefit of Architects, Builders and Apartment Owners at every Murphy office —assistance in arranging floor plan layouts, and giving practical installation data—without cost —promptly. Let us work with you.

Murphy Door Bed Co.
Technical Department

OFFICES IN ALL PRINCIPAL CITIES

469 Fifth Ave.
New York City

22 W. Monroe Street
Chicago, Illinois

248 Boylston St.
Boston, Mass.

1410 Kresge Building
Detroit, Mich.

Terminal Sales Bldg.
Seattle, Wash.

1534 Blake Street
Denver, Colo.

153 Peel Street
Montreal, Canada

1140-42 Hanna Building
Cleveland, Ohio

702 Bulletin Building
Philadelphia, Pa.

Crocker Building
San Francisco, Cal.

403 Morris Building
Baltimore, Md.

1309 Keenan Bldg.
Pittsburg, Pa.

315 North Tenth St.
St. Louis, Mo.

204 Peach Tree Arcade Bldg.
Atlanta, Ga.

1114 Grand Avenue
Kansas City, Mo.

309 3rd Ave. North
Nashville, Tenn.

Cutler Building
Rochester, N. Y.

1919 Pacific Ave.
Dallas, Texas

1807 South Main St.
Los Angeles, Cal.

AVERY LIBRARY
COLUMBIA UNIVERSITY

COLUMBIA UNIVERSITY

Table of Contents

Page

4—For Apartments, Homes.

5—A Room Behind the Door.

6, 7—How the Murphy Bed Operates.

8—The Murphy In-A-Dor (Pivot Type) Bed.

9—Illustrating Specification No. 1 with Pictures.

PLATE NO. 1

Blue Print of Specification No. 1—Bed and Door on Opposite Jambs.
Specification No. 2—Bed and Door on Same Jamb.
Specification No. 3—Sliding Door Installation. (A Folded Page Opening on Page 9).

10—Illustrating Specifications No. 2 and No. 3 with Pictures.

PLATE NO. 2

Blue Print of Specification No. 5—Two-Way Installation.
Specification No. 4—Double Door Installation.
Specification No. 10—Three Door Installation. (A Folded Page).

12—Illustrating Specification No. 10 with Pictures.

13—Illustrating Specifications No. 4 and No. 5 with Pictures.

14—A Tribute to MURPHY Equipment.

15—Illustrating Specifications No. 6 and No. 8 with Pictures.

PLATE NO. 3

Blue Print of Specification No. 6—Twin Murphy Beds; a Separate Opening for each Bed.

Specification No. 7—Twin Murphy Beds; Both Beds Through Same Opening.

Specification No. 8—Twin Beds; Beds Through Separate Openings, Optional Installation One Full Size Bed.

Specification No. 9—Twin Murphy Beds; Both Beds Through Same Opening, Optional Installation of One Full Size Bed.

16—Illustrating Specifications No. 7 and No. 9 with Pictures.

17—A Tribute to MURPHY Equipment.

18—The Murphy In-A-Dor (Recess Type) Bed.

PLATE NO. 4

Blue Print of Specification No. 13—Murphy Recess Bed.

20—Illustrating Specification No. 13 with Pictures. The Murphy Canopy Bed.

21—An Attractive Duplex Bungalow Suggestion.

22—The Murphy In-A-Dor (Wide Door Type) Bed.

PLATE NO. 5

Blue Print of Specification No. 11—Wide Door Off-Center Pivot Installation.

24—Illustrating Specification No. 11 with Pictures.

25, 26, 27—Tributes to MURPHY Equipment.

28—The Murphy In-a-Dor (Roller Type) Beds.

Table of Contents [Continued]

PLATE NO. 6

Blue Print of Specification No. 12—Murphy Roller Bed.

Page

30—Illustrating Specification No. 12 with Pictures.

31—A Tribute to MURPHY Equipment.

32—The Murphy Buffet Model Steel Kitchen—Arrangement Showing Shelf and Drain Basket.

PLATE NO. 7

Blue Print of Murphy Steel Kitchenette—Complete Assembly. (A Folded Page Opening on Page 33).

Blue Print of Spec. No. 12—Murphy Roller Bed.

34—The Murphy Standard Model Steel Kitchen—Arrangement Showing Drain Board Sink.

35—A Tribute to MURPHY Equipment.

PLATE NO. 8

Blue Print Showing Service Compartments and Refrigerator Drain locations of Unit REF-120, REF-130. Blue Print Details of Three Burner and Four Burner Stove Units ST-30, ST-40.) (A Folded Page Opening on Page 35).

36—A Tribute to MURPHY Equipment.

37—Murphy Steel Bath Room Cabinets—Model "A"—Model "B."

PLATE NO. 9

Blue Print Details of Three and Four Burner Stove Units, No. ST-30, No. ST-40. (A Folded Page Opening on Page 37).

38—Murphy Wall Mirror—Model "W." Murphy Medicine Cabinet—Model "F."

39—A Murphy Equipped Kitchen.

PLATE NO. 10

Blue Print Details of Model "A" Bath Room Cabinet, Model "B" Bath Room Cabinet, Model "W" Wall Mirror, Model "F" Medicine Cabinet, Utility Unit RU-220, RU-230, Broom Cabinet, Shelf and Drain Basket Unit, and Pan Cabinet. (A Folded Page Opening on Page 39).

40—The Murphy Cabinet Ironing Board.

PLATE NO. 11

Blue Print Details of Murphy Cabinet Ironing Board.

42—A Tribute to MURPHY Equipment.

Copyrighted in 1925 by

MURPHY DOOR BED COMPANY

and Printed in U. S. A.

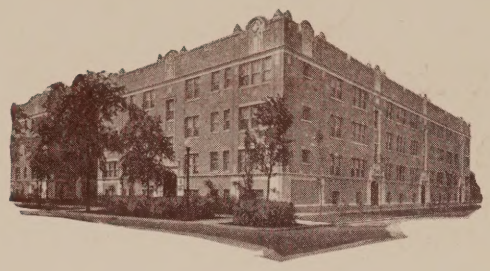

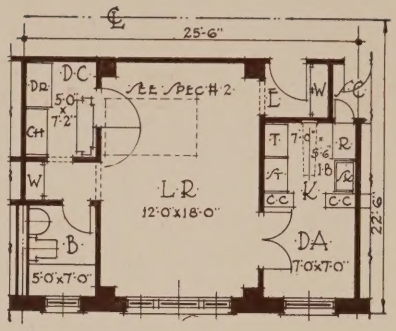

for APARTMENTS

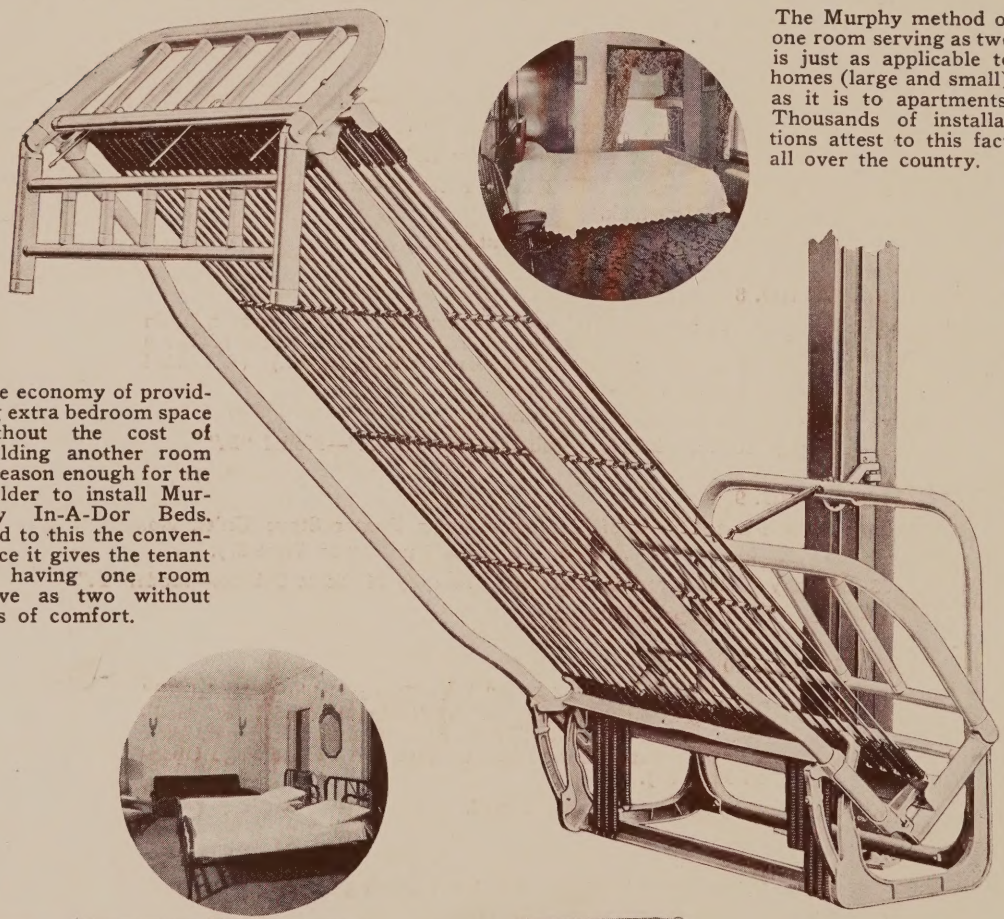

The Murphy method of one room serving as two is just as applicable to homes (large and small) as it is to apartments. Thousands of installations attest to this fact all over the country.

The economy of providing extra bedroom space without the cost of building another room is reason enough for the builder to install Murphy In-A-Dor Beds. Add to this the convenience it gives the tenant of having one room serve as two without loss of comfort.

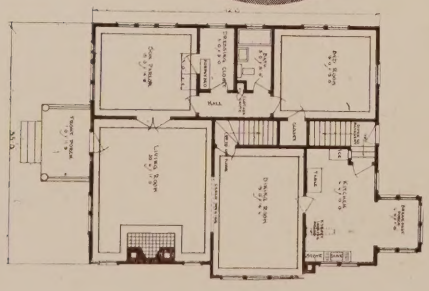

for HOMES

A Room Behind the Door

Another Room without the Cost of Building it by Adding a Murphy Bed

BY DOUBLING the living accommodations of an apartment or home, the tenant needs and occupies a less number of rooms, saves in the cost of furniture and rental, while the owner increases the revenue on his investment—a mutual benefit to both owner and tenant. Therefore, the use of the Murphy Bed is purely an economic question.

To live the modern way—demands that every inch of space in an apartment or home be usable day and night. In the smaller homes and apartments, a bedroom that is not convertible to another use during the day is wasted space and too high an overhead at the present living costs to both tenant and owner. Again, the home or apartment that has no extra bedroom for the unexpected guest or the growing family is undesirable and inconvenient.

There is plenty of evidence contained in this manual that the Murphy Bed has conclusively overcome the old-time prejudice held by many against the concealed bed. The Murphy In-A-Dor Bed principle is conceded the most practical method of lowering building investments and of doubling the usefulness of any room or porch from the tenant's point of view.

Apartments and homes designed and built around the Murphy Bed idea are conceded by this country's leading Architects, Builders and Owners, to be the highest development of the concealed bed principle.

If you are planning on building a home or an apartment, write or visit the nearest Murphy office—talk the matter over with us, because the Murphy Bed planned into a home or an apartment means another "Bedroom Behind the Door" with a saving in building cost of $500 to $1000 per unit.

After a careful study of this Manual you can readily understand the tremendous popularity of the Murphy Bed. It is a sanitary—comfortable—all metal regular (standard size and twin) bed, pivoted to the jamb and threshold of a STANDARD size door opening. Its exclusively patented method of installation enables it to be swung through a doorway practically half as wide as the bed itself (an exclusive Murphy feature of great importance to obtain perfect concealment)—and is lowered into place with the utmost of ease. The bed is perfectly balanced in any position and cannot close up accidentally. The bed clothing is always held in place regardless of the position of the bed.

That is why it is used in up-to-date homes—large and small—in hospitals, in residential hotels, apartments, dormitories, emergency rest rooms — in fact, wherever people are housed.

If this Manual does not cover practical ideas applicable to your own problems—let our Technical Service Department solve it for you.

There's only one IN-A-DOR Bed— the Murphy

How the MURPHY BED Operates:

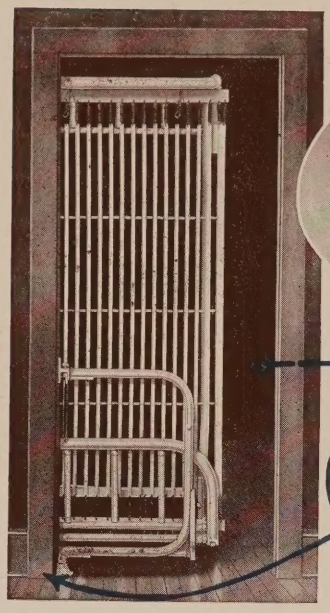

(1) *In the Closet*

The illustration to the left clearly shows how the Murphy In-A-Dor Bed is pivoted entirely free from the door—how it swings out of the way into bed closet and is perfectly concealed when door is closed.

AMPLE ENTRANCE WHEN BED IS IN CLOSET

STANDARD PARTITION CARRIES NO WEIGHT NO SPECIAL CONSTRUCTION REQUIRED

UPPER HINGE ARM—A GUIDE—CARRIES NO WEIGHT

DROP FRAME ALLOWS PERFECT RESILIENCY AT EDGE OF BED

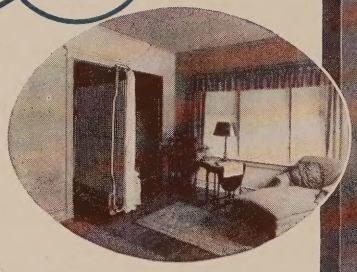

(2) *Half Way Out*

This illustrates how the Murphy principle allows a 4′—6″ bed to swing through a 3′ opening. A feature to be found only in the "Murphy."

MATTRESS, BEDDING AND PILLOWS HELD SECURELY BY FOLDED HEAD-FRAME

LOWER HINGE ARM RESTS SOLIDLY IN SOCKET ATTACHED TO FLOOR—CARRIES ENTIRE WEIGHT OF BED

ALL CASTINGS ON BED ARE MALLEABLE IRON—WILL NOT BREAK

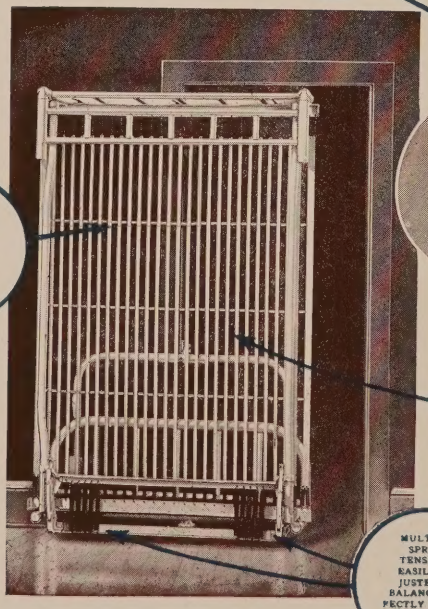

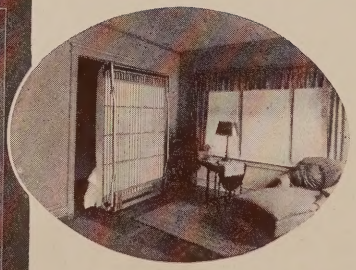

FAMOUS "SLUMBER KING" SPRING BUILT FOR SLEEP

UNDER SIDE OF BED ACCESSIBLE FOR CLEANING

MULTIPLE SPRING TENSION—EASILY ADJUSTED TO BALANCE PERFECTLY WEIGHT OF BED AND BEDDING

(3) *Ready to Lower*

Here it is seen that all parts of the Murphy Bed are readily accessible for cleaning — a necessary sanitary detail — a feature to be found in all "Murphy Beds."

(4) *Part Way Down*

The Multiple Spring Balance principle as applied to Murphy Beds, reduces friction to a minimum and is responsible for their perfect balance and ease of operation.

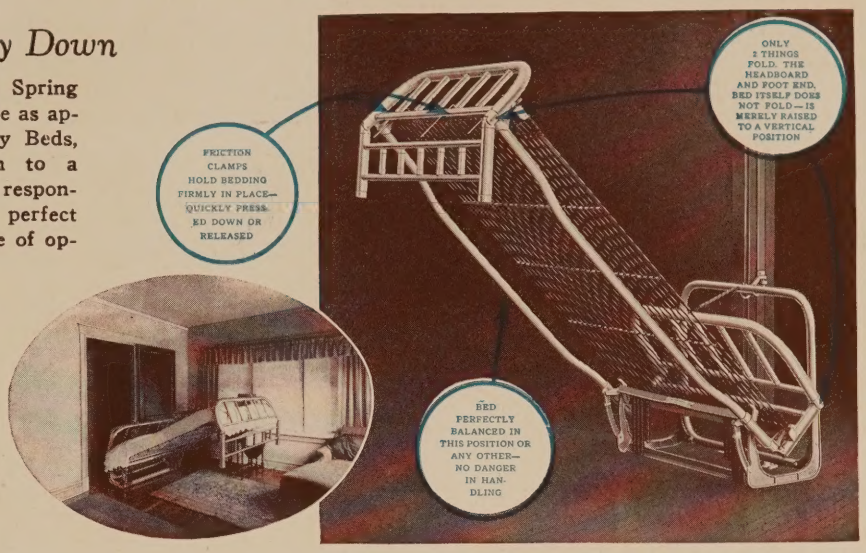
FRICTION CLAMPS HOLD BEDDING FIRMLY IN PLACE—QUICKLY PRESSED DOWN OR RELEASED
ONLY 2 THINGS FOLD. THE HEADBOARD AND FOOT END. BED ITSELF DOES NOT FOLD—IS MERELY RAISED TO A VERTICAL POSITION
BED PERFECTLY BALANCED IN THIS POSITION OR ANY OTHER—NO DANGER IN HANDLING

A Standard Bed in Every Respect

4 ft. 6 in. wide, 6 ft. 4 in. long. Concealed behind an Ordinary Door 3 ft. wide.

THE MURPHY BED is a sanitary, all-metal, regular bed, which is pivoted to the jamb and threshold of a closet door by means of a simple (patented) mechanism which permits it to swing through the doorway and be easily lowered into position for use. It cannot be closed up accidentally from any position, but can be moved up and down or swung in and out of closet with the slightest of effort. Bed clothing and mattress is firmly held in regardless of the position of the bed.

Made in Four (4) Standard Sizes to Use Ordinary Mattresses of following Dimensions:

(4'-6" x 6'-4") (4' x 6'-4") (3'-6" x 6'-4") (3' x 6'-4") of 1½" and 2" round and square tubing; finished as follows: Brown Enamel, Wood and other Enamel finishes to match any kind of furniture or woodwork.

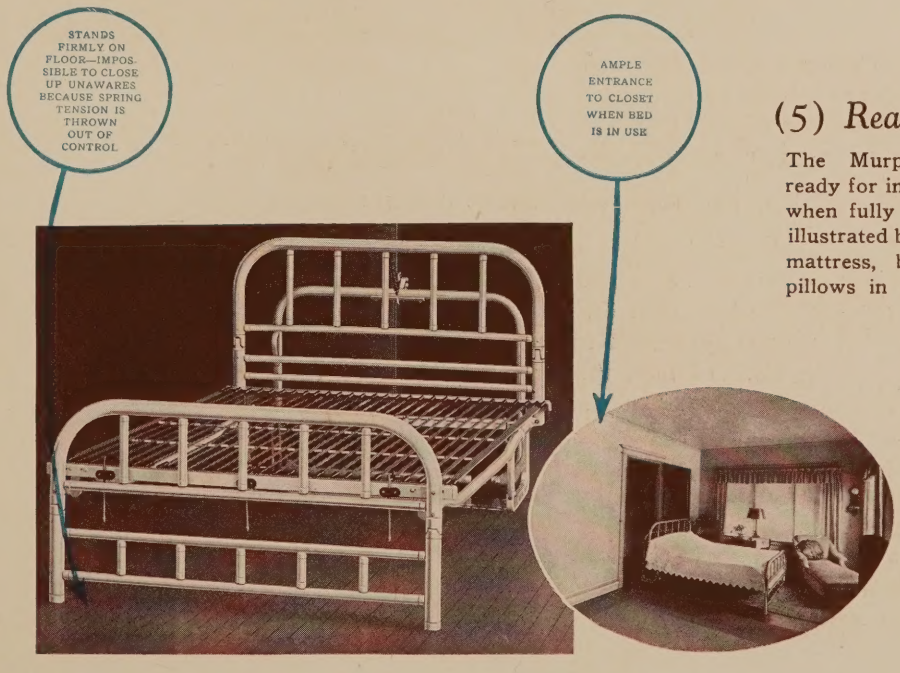
STANDS FIRMLY ON FLOOR—IMPOSSIBLE TO CLOSE UP UNAWARES BECAUSE SPRING TENSION IS THROWN OUT OF CONTROL
AMPLE ENTRANCE TO CLOSET WHEN BED IS IN USE

(5) *Ready to Use*

The Murphy Bed is ready for immediate use when fully lowered (as illustrated below)—with mattress, bedding and pillows in place.

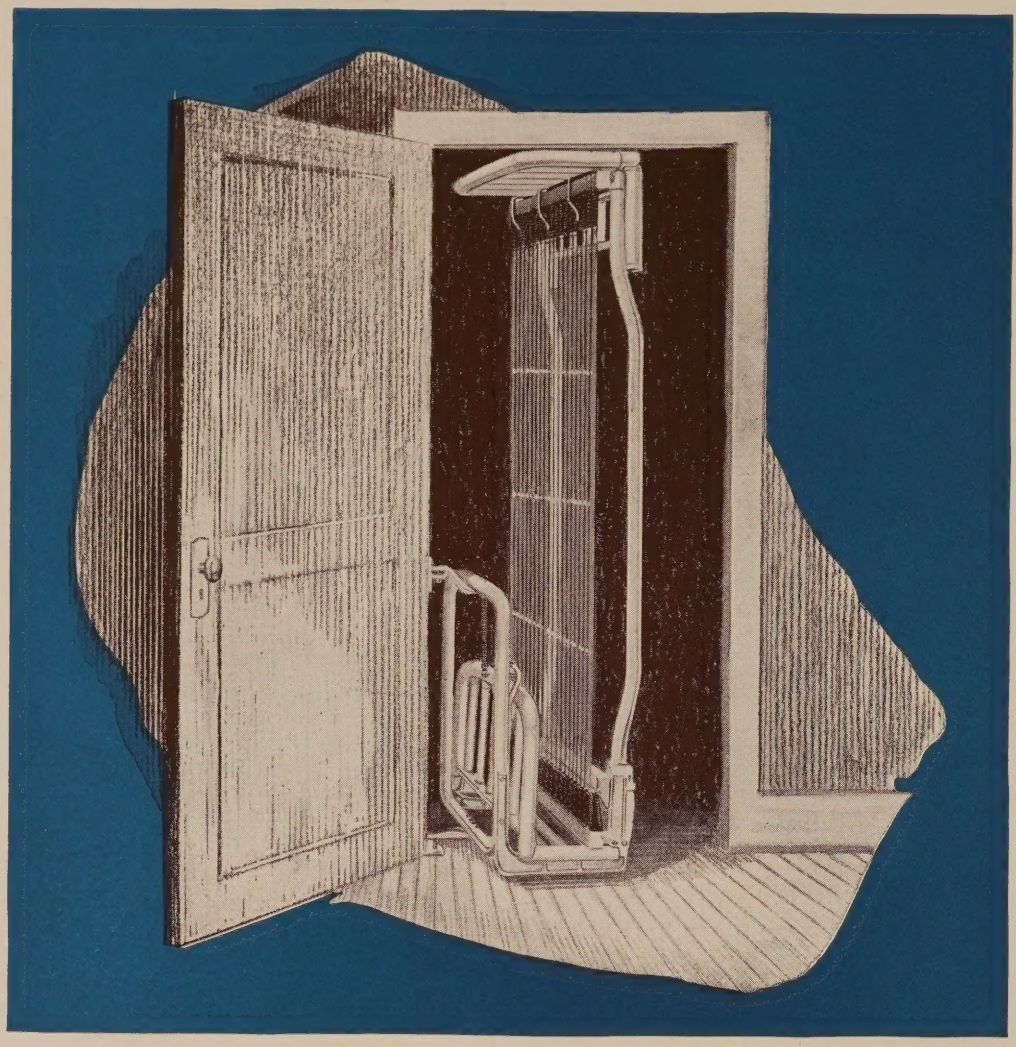

The Murphy IN-A-DOR (Pivot Type) Bed

Perfect Concealment a Feature

SINCE the development of the Murphy In-A-Dor Bed, which separates the bed from the door and rests the entire weight of the bed upon the floor—the wide door type of bed has practically passed into disuse in modern apartments and hotels. In fact, the Murphy In-A-Dor (Pivot Type) of Bed is far out-selling any other type of concealed bed made. The Murphy In-A-Dor Bed principle of installation allows a full-size bed to be perfectly concealed behind an ordinary door only 3'-0" wide—with the bed easily clearing door opening when revolved into room and lowered for use. It allows free access to the closet when not in use and leaves door free from all weight. Specifications of this type of bed are shown on succeeding pages in blue-print form—with unit plans that are now in practical use in successful apartments and homes.

Specification No. 1, Door and Bed on Opposite Jambs

(Illustrated with pictures) See Blue-Print Plate "1" Open this Folded page)

(1) Door closed—note perfect concealment

(3) Bed half-way out—a full size bed thru an ordinary door

(2) Door open—showing position of bed when not in use

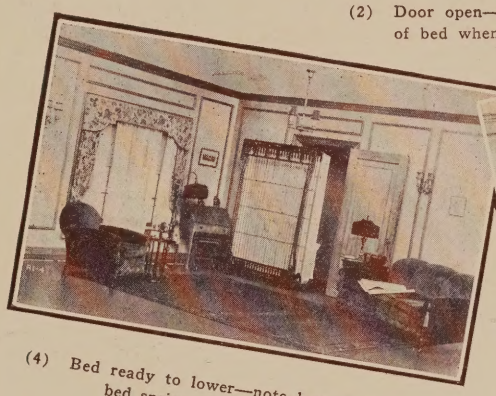

(4) Bed ready to lower—note how easily bed springs may be cleaned

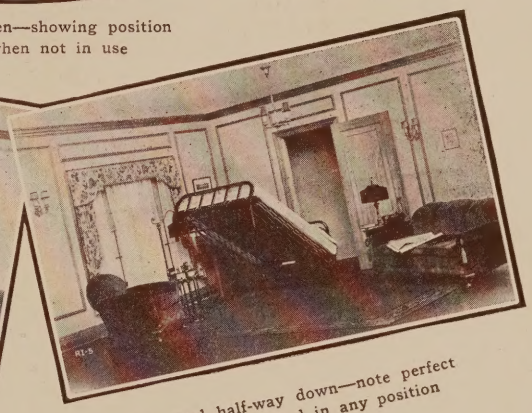

(5) Bed half-way down—note perfect balance of bed in any position

(6) Bed on floor—ready for use. Free access to closet when bed is up or down

(7) Bed on floor at angle—no need of moving furniture. Just swing bed

MURPHY DOOR BED CO.

TECHNICAL DEPT *PLATE I.*

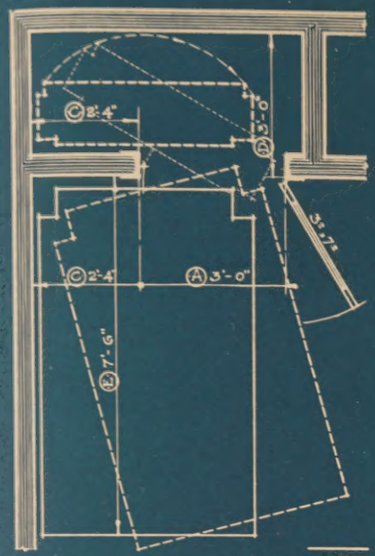

SPECIFICATION No. 1

BED AND DOOR ON OPPOSITE JAMBS

SHOWING MINIMVM CLOSET DIMENSIONS FOR MVRPHY PIVOT BED.

A STANDARD FVLL SIZE BED 4'-6" WIDE 6'-4" LONG — INSIDE HEAD AND FOOT ENDS.

ACCOMODATING STANDARD MATTRESS

BED CAN BE PIVOTED TO EITHER RIGHT OR LEFT JAMB — PROVIDED THERE IS SVFFICIENT BED POCKET.

(A) DOOR	WIDTH	3'-0"
	HEIGHT	7'-0"
	SEE NOTE BELOW.	
(C) BED POCKET		2'-4"
(D) DEPTH OF CLOSET INSIDE PLASTER LINE TO OVTSIDE PLASTER LINE		3'-0"
(E) BED CLEARANCE WALL TO FOOT END OF BED WHEN LOWERED IN ROOM		7'-6"
DOOR KNOB HEIGHT		3'-0"

• NOTE •

BEDS VNDER STANDARD LENGTH CAN BE FVRNISHED FOR DOORS VNDER 7'-0" HIGH NOT LESS THAN 6'-8" HIGH

SEE APPLICATION OF THIS SPECIFICATION IN VNITS NVMBERS
3 · 7 · 8 · 14 · 33 · 34 · 35 · 40 · 47 · 48 · 59.

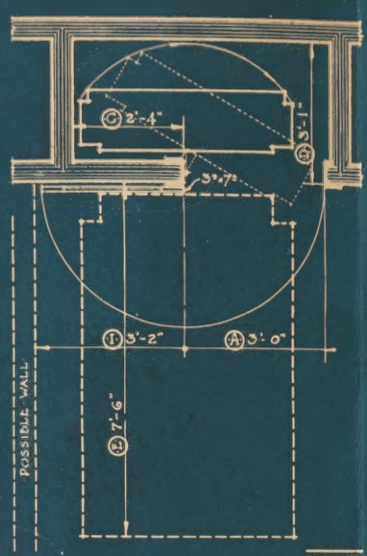

SPECIFICATION No. 2

BED AND DOOR ON SAME JAMB

SHOWING MINIMVM CLOSET DIMENSIONS FOR MVRPHY PIVOT BED.

A STANDARD FVLL SIZE BED 4'-6" WIDE 6'-4" LONG — INSIDE HEAD AND FOOT ENDS.

ACCOMODATING STANDARD MATTRESS

BED CAN BE PIVOTED TO EITHER RIGHT OR LEFT JAMB — PROVIDED THERE IS SVFFICIENT BED POCKET.

(A) DOOR	WIDTH	3'-0"
	HEIGHT	7'-0"
	SEE NOTE BELOW.	
(C) BED POCKET		2'-4"
(D) DEPTH OF CLOSET INSIDE PLASTER LINE TO OVTSIDE PLASTER LINE		3'-1"
(E) BED CLEARANCE WALL TO FOOT END OF BED WHEN LOWERED IN ROOM		7'-6"
(F) DOOR CLEARANCE		3'-2"

• NOTE •

BEDS VNDER STANDARD LENGTH CAN BE FVRNISHED FOR DOORS VNDER 7'-0" HIGH NOT LESS THAN 6'-8" HIGH

SEE APPLICATION OF THIS SPECIFICATION IN VNITS NVMBERS
5 · 6 · 9 · 10 · 12 · 15 · 20 · 23 · 25 · 27 · 31 · 33 · 35 · 43 · 44 · 45 · 46 · 49 · 50 · 51 · 52 · 55 · 56 · 57 · 58 · 60.

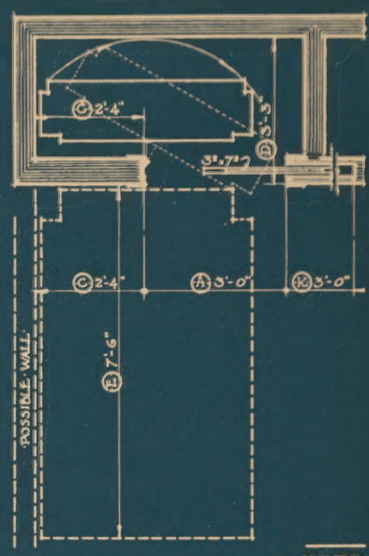

SPECIFICATION No. 3

SLIDING DOOR INSTALLATION PERMITS CLOSING THE OPENING

BED POCKET AND SLIDING DOOR POCKET MVST BE ON OPPOSITE SIDES OF OPENING

SHOWING MINIMVM CLOSET DIMENSIONS FOR MVRPHY PIVOT BED.

A STANDARD FVLL SIZE BED 4'-6" WIDE 6'-4" LONG — INSIDE HEAD AND FOOT ENDS.

ACCOMODATING STANDARD MATTRESS

(A) DOOR	WIDTH	3'-0"
	HEIGHT	7'-0"
	SEE NOTE BELOW.	
(C) BED POCKET		2'-4"
(D) DEPTH OF CLOSET INSIDE PLASTER LINE TO OVTSIDE PLASTER LINE		3'-3"
(E) BED CLEARANCE WALL TO FOOT END OF BED WHEN LOWERED IN ROOM		7'-6"
(K) SLIDING DOOR POCKET		3'-0"

• NOTE •

BEDS VNDER STANDARD LENGTH CAN BE FVRNISHED FOR DOORS VNDER 7'-0" HIGH NOT LESS THAN 6'-8" HIGH

SEE APPLICATION OF THIS SPECIFICATION IN VNITS NVMBERS
23.

MINIMVM CLOSET DIMENSIONS FOR OTHER WIDTH BEDS

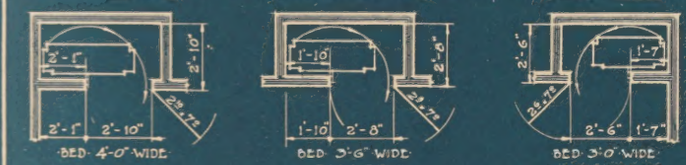

MINIMVM CLOSET DIMENSIONS FOR OTHER WIDTH BEDS

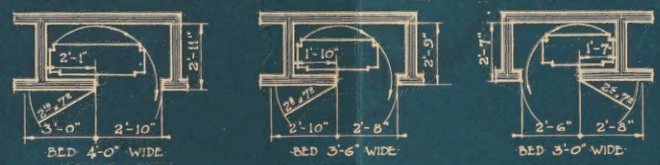

MINIMVM CLOSET DIMENSIONS FOR OTHER WIDTH BEDS

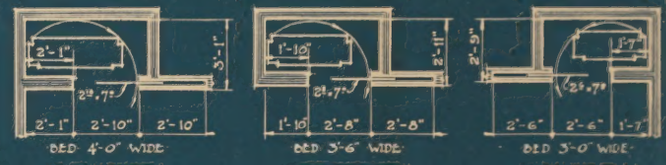

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION NO. 1

BED AND DOOR ON OPPOSITE JAMBS, SO BED CAN BE DROPPED DOWN CLEAR OF WALL WITHOUT INTERFERENCE FROM DOOR.

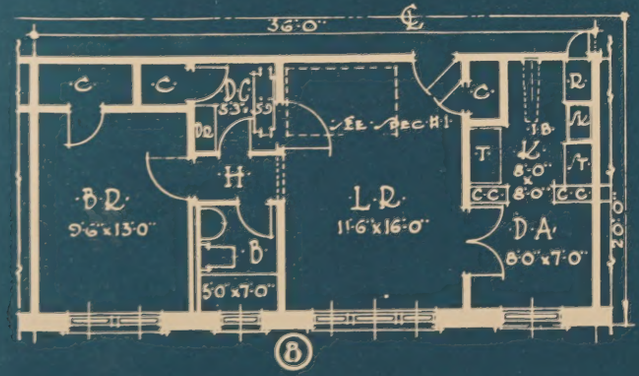

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION NO. 2

BED AND DOOR ON SAME JAMB, SO BED AND DOOR SWING CLEAR OF WINDOWS.

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION NO. 3

SLIDING DOOR INSTALLATION TO GIVE PRIVACY TO BOTH ROOMS WHEN BEDS ARE IN USE.

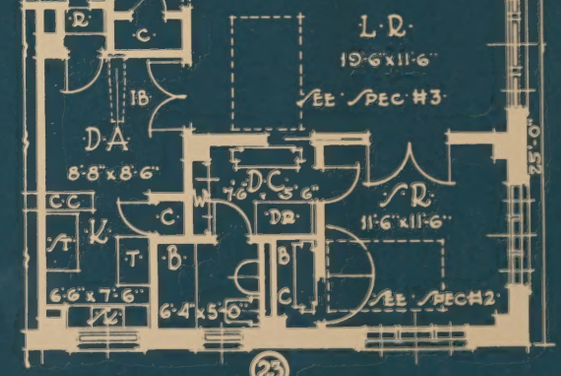

There's Only One "IN-A-DOR" Bed — The MURPHY

Specification No. 2, Door and Bed on Same Jamb

(Illustrated with pictures—See Blue-Print Plate "1" preceding Folded page)

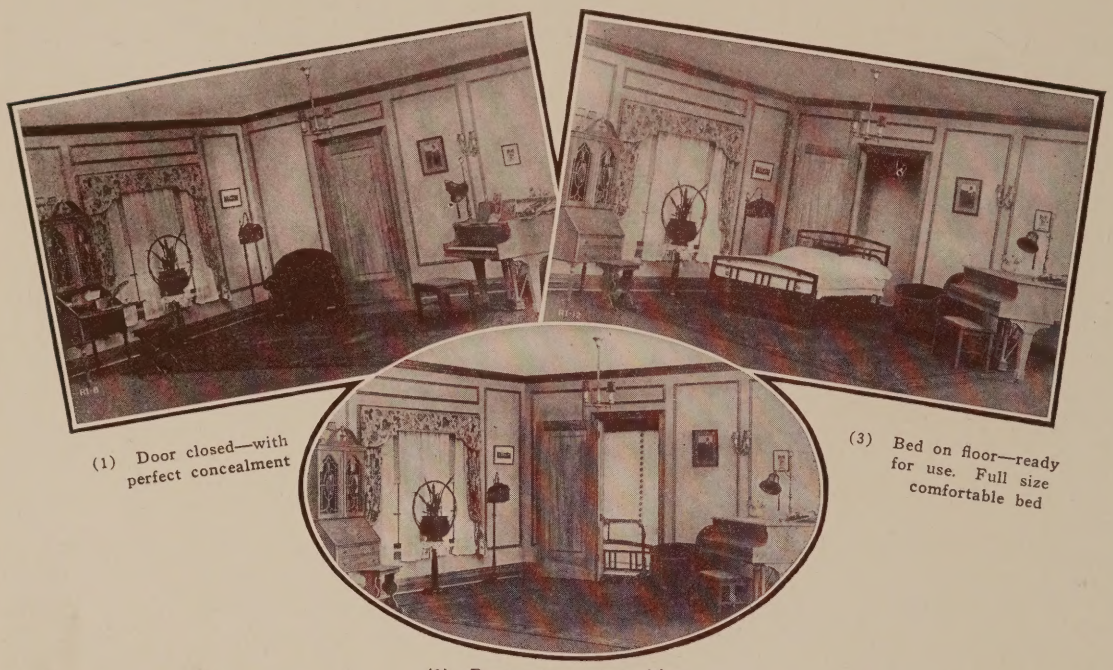

(1) Door closed—with perfect concealment

(3) Bed on floor—ready for use. Full size comfortable bed

(2) Door open—note position of bed when not in use

Specification No. 3, Sliding Door

(Illustrated with pictures—See Blue-Print Plate "1" preceding Folded page)

(1) Door closed—note perfect concealment

(3) Bed on floor—ready for use—with sliding door closed

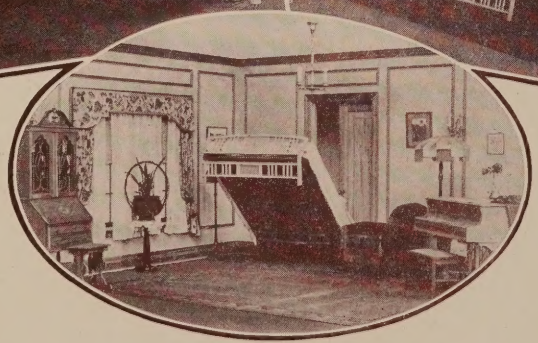

(2) Bed half-way down—note perfect balance of bed in any position

SPECIFICATION No. 5

TWO WAY INSTALLATION

SHOWING MINIMVM CLOSET DIMENSIONS FOR MVRPHY PIVOT BED 4'-6" x 6'-4" WHERE BED MAY EITHER REVOLVE INTO ROOM OR BE LOWERED INTO ADJOINING ROOM OR PORCH

(A) DOORS WIDTH ONE 3'-0"
WIDTH TWO 2'-6"
HEIGHT 7'-0"
FOR 6'-8" DOOR SEE NOTE SPEC #1

(C) BED POCKET 2'-8"
NOTE RELATIVE POSITION OF 3'-0" OPENING TO CENTER LINE OF 5'-0" OPENING

(D) DEPTH OF CLOSET 3'-2"
OVTSIDE PLASTER LINE TO OVTSIDE PLASTER LINE INCLVDING BOTH WALLS

(E) BED CLEARANCE 7'-6"
WALL TO FOOT END OF BED WHEN LOWERED IN ROOM

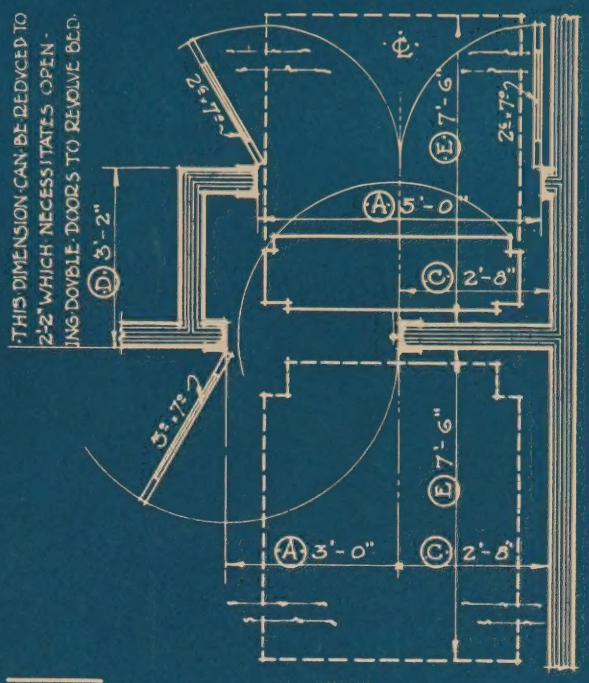

SEE APPLICATION OF THIS SPECIFICATION IN VNITS NVMBERS 36

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION NO. 5

SHOWING A METHOD OF USING ONE MURPHY BED IN TWO DIFFERENT ROOMS

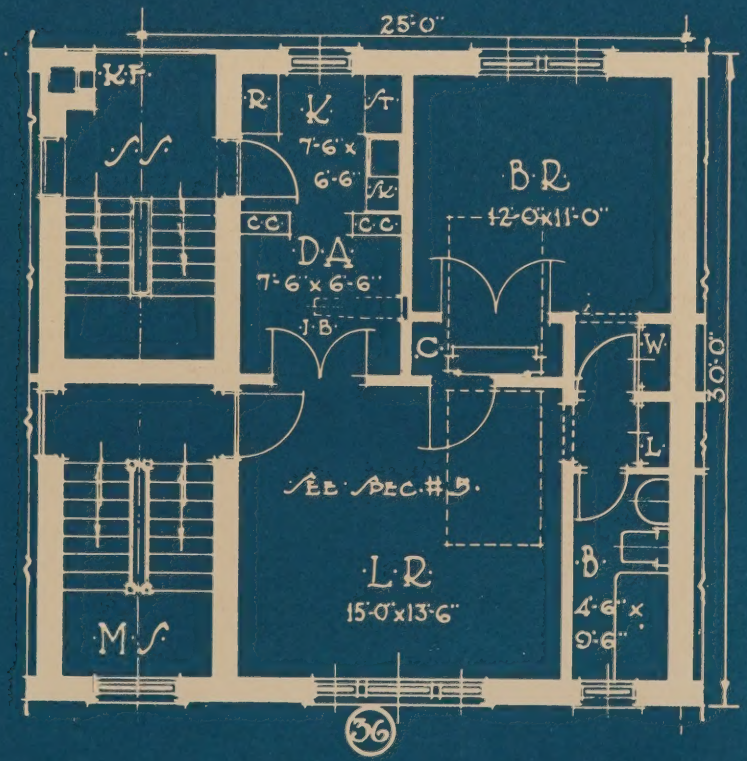

MURPHY DOOR BED CO.

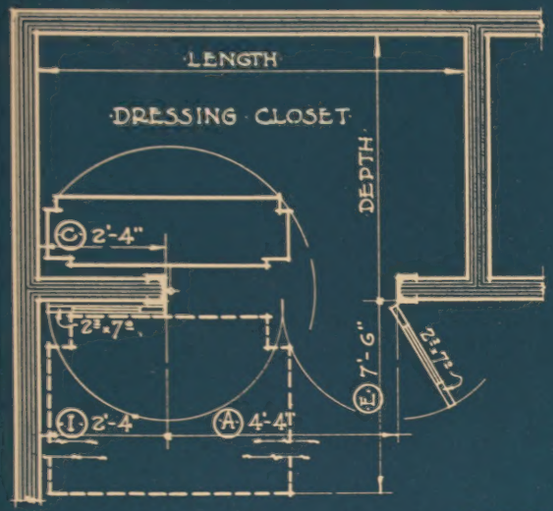

SPECIFICATION NO. 4

DOUBLE DOOR INSTALLATION

SHOWING MINIMUM REQUIRED DIMENSIONS FOR FULL SIZE MURPHY BED 4'6" x 6'4" IN DRESSING CLOSET WHERE ENTRY MUST NECESSARILY BE MADE THRU BED OPENING

(A) DOORS	WIDTH TWO	2'-2"
	HEIGHT	7'-0"
FOR 6'8" DOOR SEE NOTE SPEC #1		
(C) BED POCKET		2'-4"
(E) BED CLEARANCE WALL TO FOOT END OF BED WHEN LOWERED IN ROOM		7'-6"
(I) DOOR CLEARANCE		2'-4"

SEE APPLICATION OF THIS SPECIFICATION IN UNITS NUMBERS
4-13-31

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION NO.4

SHOWING DOUBLE DOORS — WHERE ENTRY MUST BE MADE THRU BED OPENING TO BATHROOM

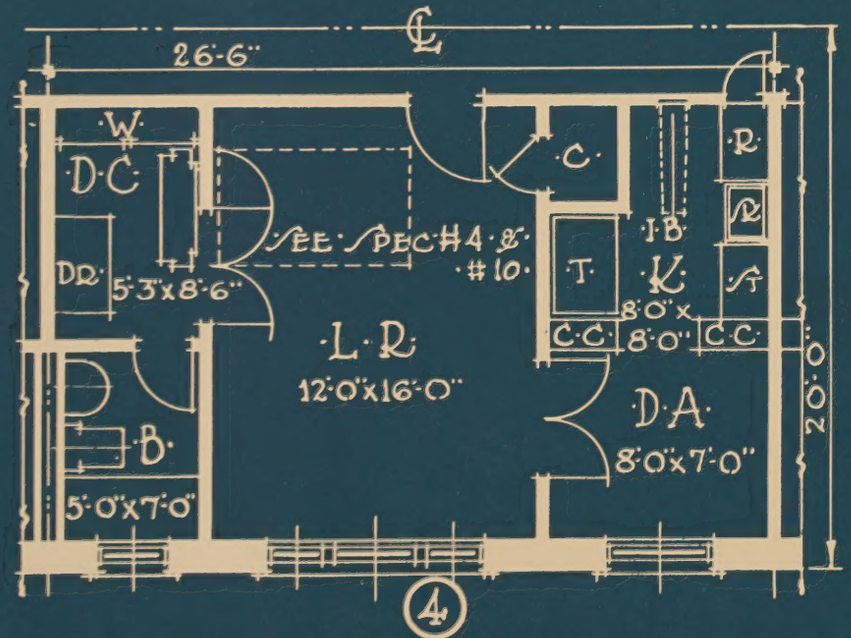

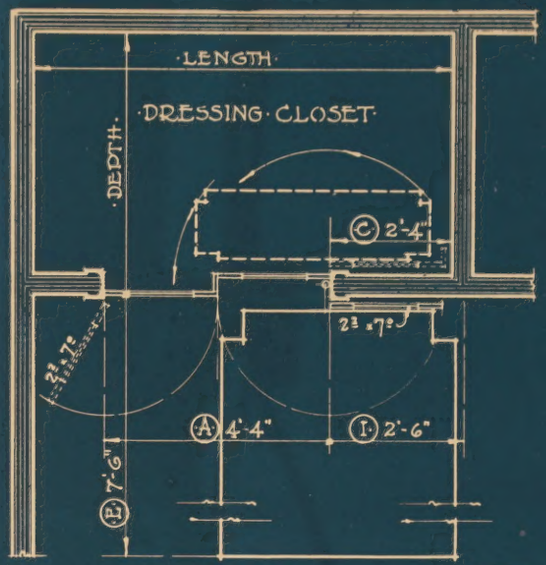

SPECIFICATION NO. 10

THREE DOOR INSTALLATION

SHOWING MINIMUM REQUIRED DIMENSIONS FOR MURPHY PIVOT BED 4'6" x 6'4" IN DRESSING CLOSET WHERE ENTRY MUST BE THRU BED OPENING, AND OPENING CLOSED WHEN BED IS IN USE

(A) DOORS	WIDTH THREE	2'-2"
	HEIGHT	7'-0"
FOR 6'8" DOOR SEE NOTE SPEC #1		
(C) BED POCKET		2'-4"
(E) BED CLEARANCE WALL TO FOOT END OF BED WHEN LOWERED IN ROOM		7'-6"
(I) DOOR CLEARANCE		2'-6"

SEE APPLICATION OF THIS SPECIFICATION IN UNITS NUMBERS
4-13-31

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION NO.10

WHERE ENTRY TO BATHROOM IS REQUIRED FROM LIVING ROOM WHEN MURPHY BED IS IN USE — BUT WHERE THIS ENTRY MUST BE CLOSEABLE WHEN BOTH LIVING ROOM BED AND BEDROOM ARE IN USE AT SAME TIME

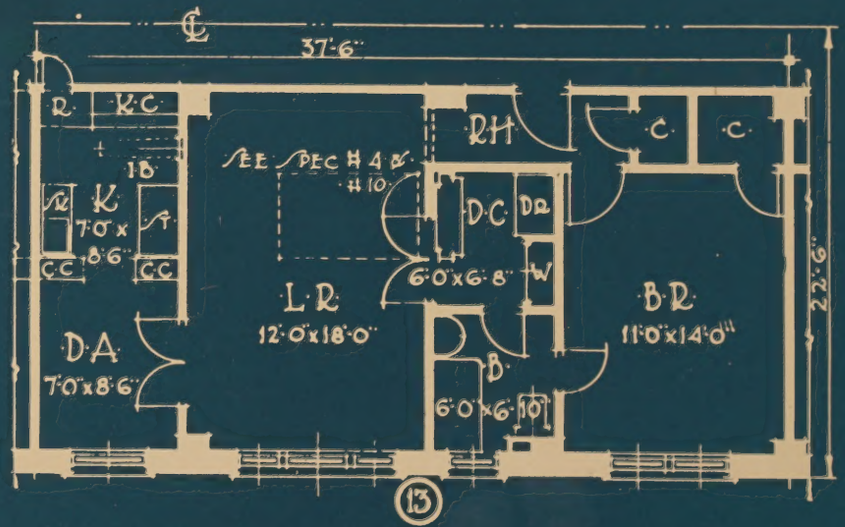

There's Only One "IN-A-DOR" Bed — The MURPHY

Specifications No. 10, Three Doors—*Closed Opening*

(Illustrated with pictures—See Blue-Print Plate "2" preceding Folded page)

(1) Doors closed—a perfect living room

(2) One door open—showing free access to dressing closet

(3) Two doors open—note position of bed when not in use

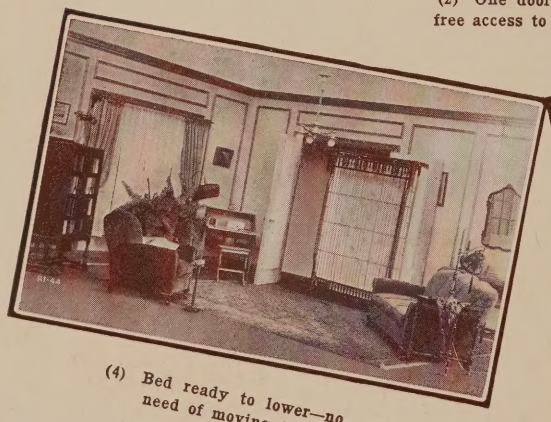

(4) Bed ready to lower—no need of moving furniture

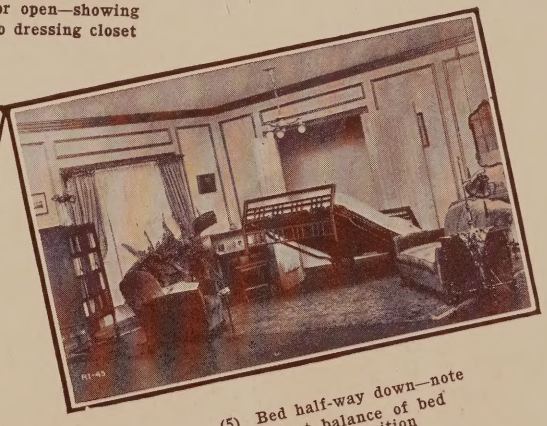

(5) Bed half-way down—note perfect balance of bed in any position

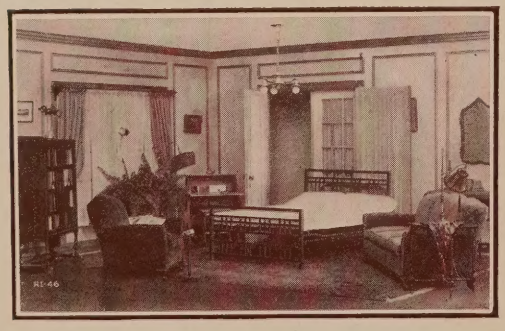

(6) Bed on floor—with third door closed—free access to dressing closet.

(7) Bed on floor—with opening closed.

Specification No. 4 Pivot Type Bed—Two Doors

(Illustrated with pictures—See Blue-Print Plate "2" preceding FOLDED page)

(1) Doors closed—very attractive living room

(3) Bed on floor—note free access to dressing closet

(2) One door open—note position of bed when not in use

Specification No. 5 "Two Way" Bed in Either of Two Rooms

(Illustrated with pictures—See Blue-Print Plate "2" preceding page)

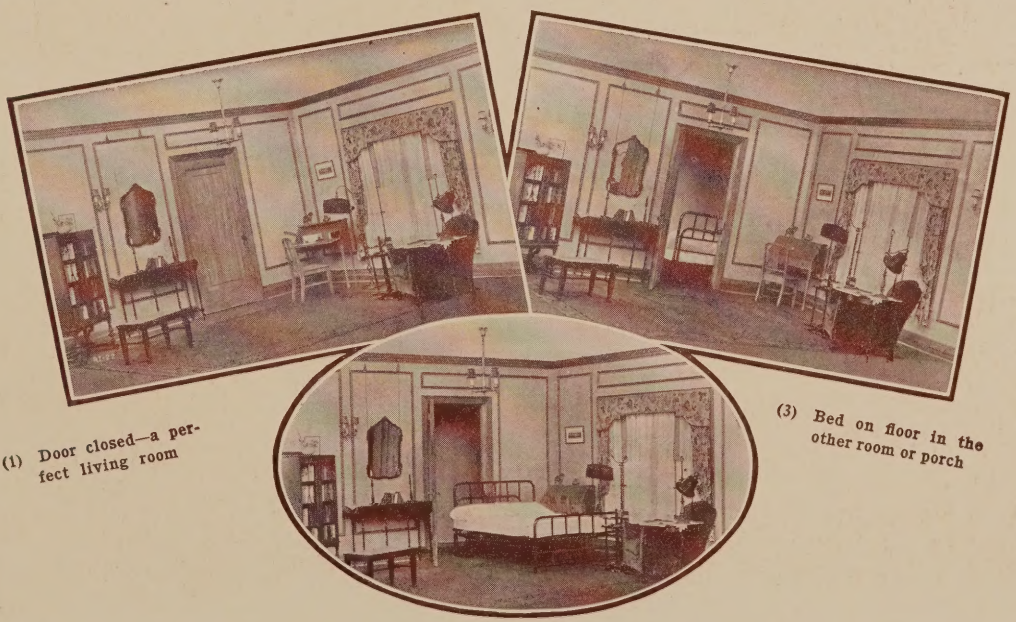

(1) Door closed—a perfect living room

(3) Bed on floor in the other room or porch

(2) Bed on floor in living room

A Tribute to MURPHY *Equipment*

WINDERMERE EAST
C.W. and GEO. L. RAPP-Architects

THE SOVEREIGN
WALTER W. AHLSCHLAGER-Architect

Representative Buildings using MURPHY IN-A-DOR BEDS

THE BELDEN
FRIDSTEIN and Co.-Engineers

PINE GROVE APARTMENTS
LOWENBERG and LOWENBERG-Architects

THE ST. GILES
LOUIS C. BOUCHARD-Architect

THE ORRINGTON
VICTOR C. CARLSON CO. Architects & Builders

Specification No. 6, Twin Beds—Separate Doors

(Illustrated in pictures—See Blue-Print Plate "3" Open this Folded page)

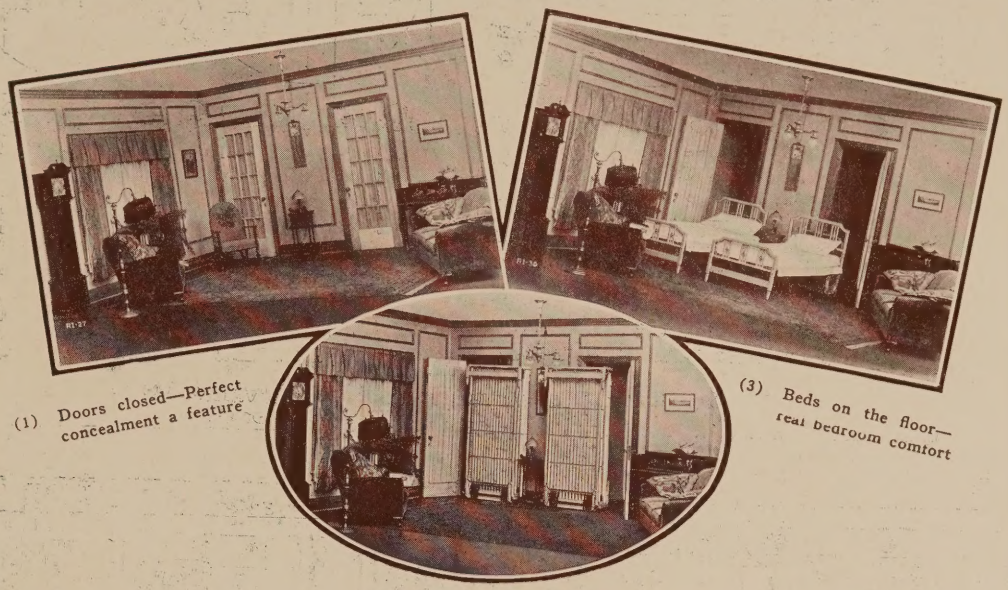

(1) Doors closed—Perfect concealment a feature

(3) Beds on the floor—real bedroom comfort

(2) Beds ready to lower

Specification No. 8, Twin and Double Beds. Interchangeable Separate Doors

(Illustrated with pictures—See Blue-Print Plate "3" Open this Folded page)

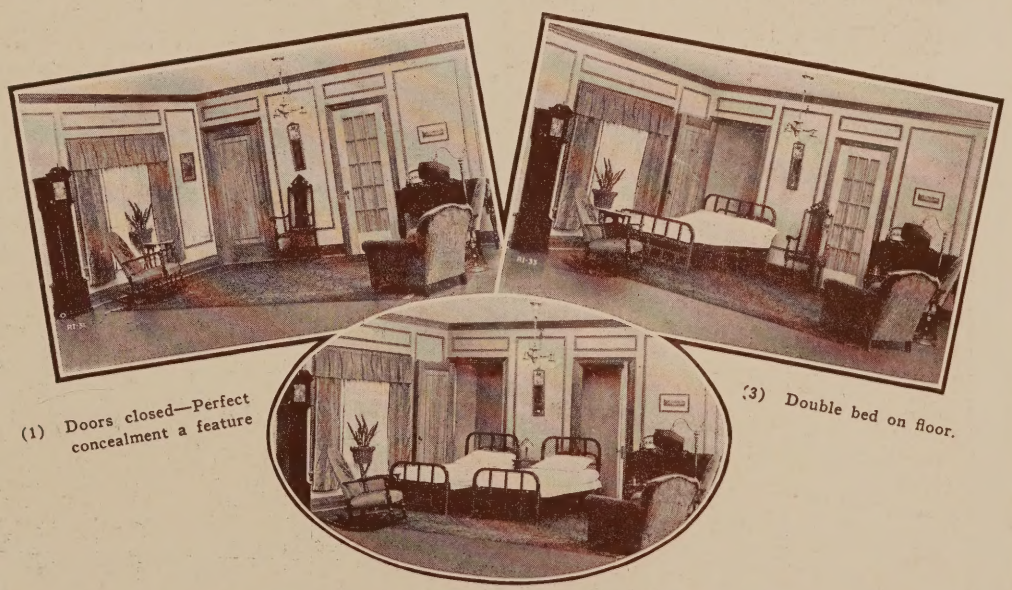

(1) Doors closed—Perfect concealment a feature

(3) Double bed on floor.

(2) Twin Beds on floor

NOTE:—In the above installation the doors are of unequal size—which allows for interchanging from twin beds or to a double bed or the reverse. A feature that is very valuable to Apartment Hotels—it allows flexibility.

MURPHY DOOR BED CO.

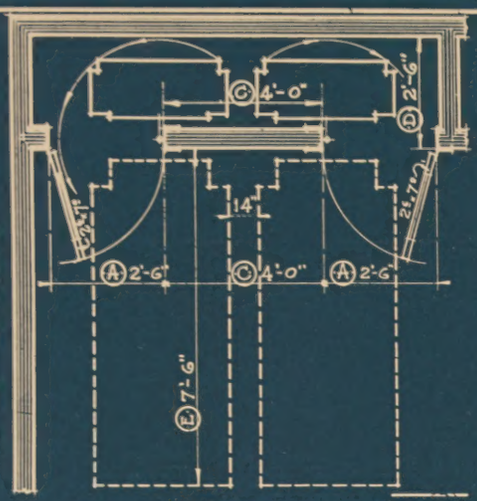

SPECIFICATION No. 6

TWIN MURPHY BEDS
A SEPARATE OPENING FOR EACH BED

SHOWING MINIMUM CLOSET DIMENSIONS FOR MURPHY PIVOT BED—TWIN ARRANGEMENT FOR STANDARD 3'-0" x 6'-4" BEDS

(A) DOORS	WIDTH	2'-6"
	HEIGHT	7'-0"
FOR 6'-8" DOOR SEE NOTE SPEC #1		
(C) BED POCKET RECOMMENDED		4'-0"
MINIMUM REQUIRED		3'-0"
(D) DEPTH OF CLOSET		2'-6"
INSIDE PLASTER LINE TO OUTSIDE PLASTER LINE		
(E) BED CLEARANCE		7'-6"
WALL TO FOOT END OF BED WHEN LOWERED IN ROOM		
DOOR KNOB HEIGHT		3'-0"

SEE APPLICATION OF THIS SPECIFICATION IN UNITS NUMBERS
·11·53·

SPECIFICATION No. 7

TWIN MURPHY BEDS
BOTH BEDS THRU SAME OPENING

SHOWING MINIMUM CLOSET DIMENSIONS FOR MURPHY PIVOT BED—TWIN ARRANGEMENT FOR STANDARD 3'-0" x 6'-4" BEDS

(A) DOORS	WIDTH	2'-2"
	HEIGHT	7'-0"
FOR 6'-8" DOOR SEE NOTE SPEC #1		
(C) BED POCKETS		1'-7"
(D) DEPTH OF CLOSET		2'-7"
INSIDE PLASTER LINE TO OUTSIDE PLASTER LINE		
(E) BED CLEARANCE		7'-6"
WALL TO FOOT END OF BED WHEN LOWERED IN ROOM		
(J) DOOR CLEARANCE		2'-4"
DOORS MUST SWING BACK AGAINST WALL		

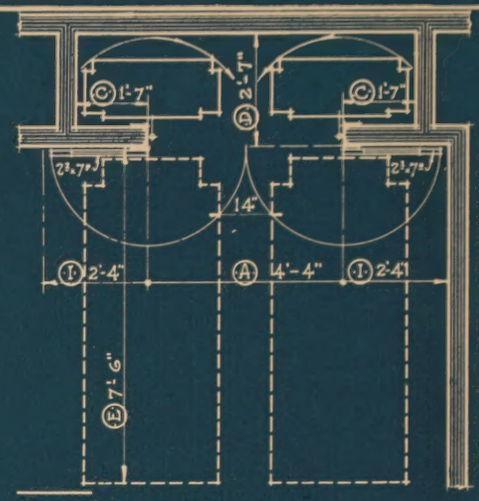

SEE APPLICATION OF THIS SPECIFICATION IN UNITS NUMBERS
·1·2·16·17·18·19·24·30·41·49·52·54·

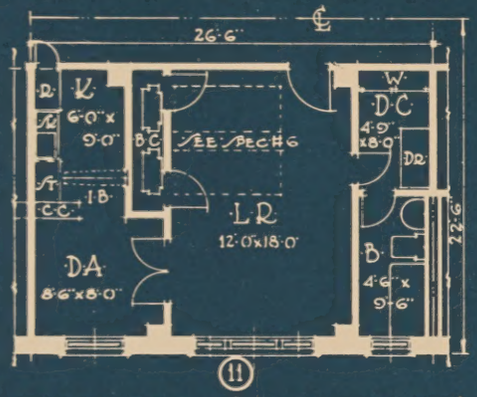

(11)

PRACTICAL (FLOOR PLAN)
APPLICATION OF SPECIFICATION No 6

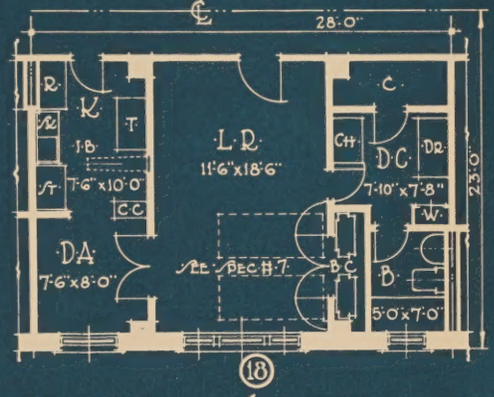

(18)

PRACTICAL (FLOOR PLAN)
APPLICATION OF SPECIFICATION No 7

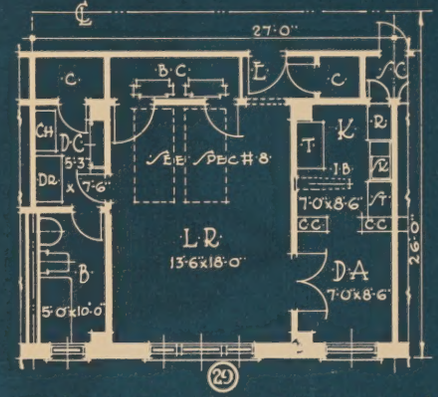

(29)

PRACTICAL (FLOOR PLAN)
APPLICATION OF SPECIFICATION No 8

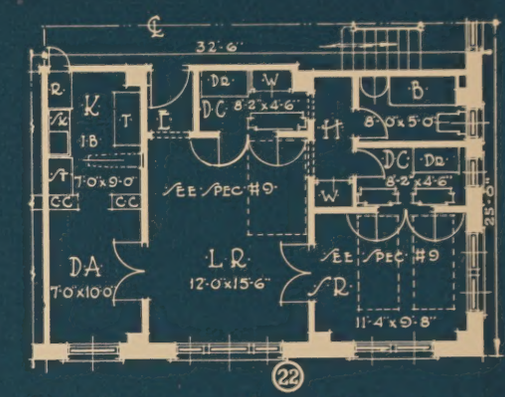

(22)

PRACTICAL (FLOOR PLAN)
APPLICATION OF SPECIFICATION No 9

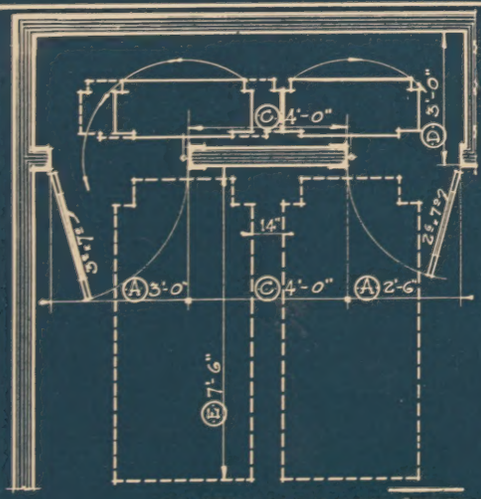

SPECIFICATION No. 8

TWIN MURPHY BEDS
BEDS THRU SEPARATE OPENINGS OPTIONAL INSTALLATION OF ONE FULL SIZE BED

SHOWING MINIMUM CLOSET DIMENSIONS FOR MURPHY PIVOT BEDS — TWIN ARRANGEMENT FOR STANDARD 3'-0" x 6'-4" BEDS OR SUBSTITUTION OF ONE FULL SIZE 4'-6" x 6'-4" BED

(A) DOORS WIDTH	ONE	3'-0"
	ONE	2'-6"
HEIGHT		7'-0"
FOR 6'-8" DOOR SEE NOTE SPEC #1		
(C) BED POCKET RECOMMENDED		4'-0"
MINIMUM REQUIRED		3'-0"
(D) DEPTH OF CLOSET		3'-0"
INSIDE PLASTER LINE TO OUTSIDE PLASTER LINE		
(E) BED CLEARANCE		7'-6"
DOOR KNOB HEIGHT		3'-0"

SEE APPLICATION OF THIS SPECIFICATION IN UNITS NUMBERS
·28·29·42·

SPECIFICATION No. 9

TWIN MURPHY BEDS
BOTH BEDS THRU SAME OPENING OPTIONAL INSTALLATION OF ONE FULL SIZE BED

SHOWING MINIMUM CLOSET DIMENSIONS FOR MURPHY PIVOT BEDS — TWIN ARRANGEMENT FOR STANDARD 3'-0" x 6'-4" BEDS OR SUBSTITUTION OF ONE FULL SIZE 4'-6" x 6'-4" BED

(A) DOORS WIDTH	TWO	2'-2"
HEIGHT		7'-0"
FOR 6'-8" SEE NOTE SPEC #1		
(C) BED POCKETS	ONE	2'-4"
	ONE	1'-7"
(D) DEPTH OF CLOSET		3'-1"
INSIDE PLASTER LINE TO OUTSIDE PLASTER LINE		
(E) BED CLEARANCE		7'-6"
(J) DOOR CLEARANCE		2'-4"
DOORS MUST SWING BACK AGAINST WALL		

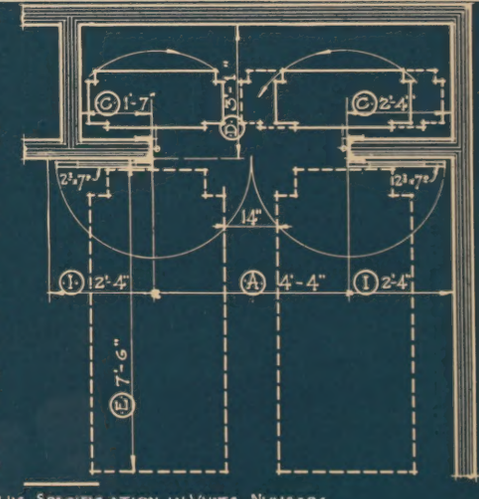

SEE APPLICATION OF THIS SPECIFICATION IN UNITS NUMBERS
·21·22·26·27·

There's Only One "IN-A-DOR" Bed — The MURPHY

Specification No. 7, Twin Beds—Double Doors

(Illustrated with pictures—See Blue-Print Plate "3" preceding Folded page)

(1) Doors closed—a perfect living room

(3) Both Beds on the floor—no need of moving furniture

(2) Doors open—one bed half-way out

Specification No. 9, Twin and Double Beds. Interchangeable Double Doors

(Illustrated with pictures—See Blue-Print Plate "3" preceding Folded page)

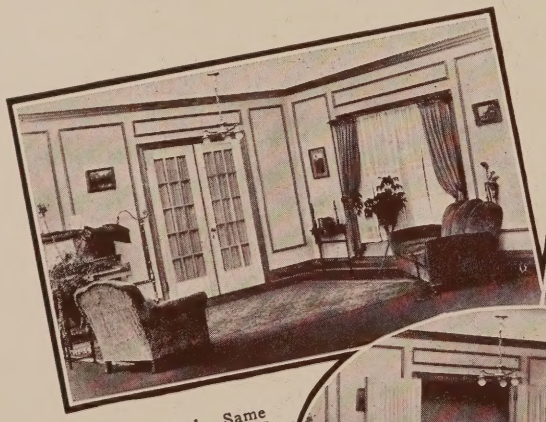

(1) Doors closed. Same as specification No. 7 illustrated above

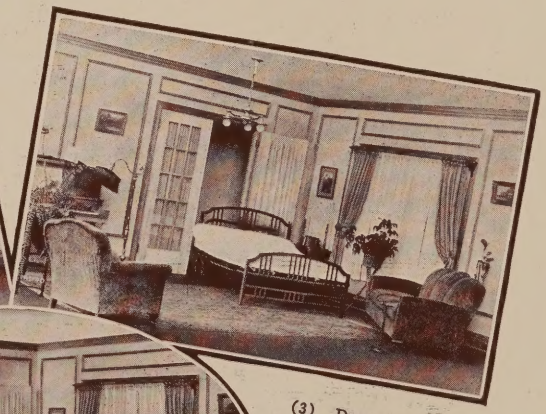

(3) Double bed on floor—an easy change to make at any time

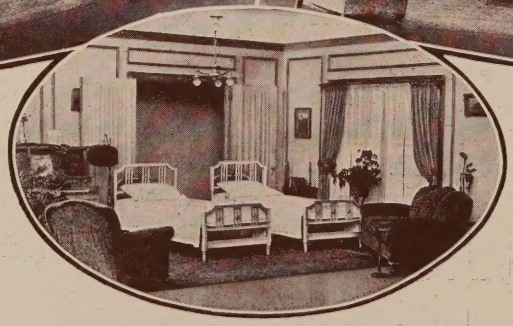

(2) Twin Beds on floor

NOTE:—For Hotel Apartments this installation is of great advantage—it allows each new tenant to be given his choice of Twin Beds or one Double Bed.

A Tribute to MURPHY *Equipment*

Resulting from 10 years of satisfactory experience with

MURPHY
In-A-Dor
BEDS

Swept by Lake Breezes

THE HOTEL SHERWIN

Sherwin Avenue at Lake Michigan
Chicago

PRIVATE OFFICE
VERNON C. McGILL
Owner and Manager

May 12th, 1924.

Murphy Door Bed Company,
22 West Monroe Street,
Chicago, Illinois.

Gentlemen:-

Now that my new hotel The Sherwin, has been completed, it has occurred to me, that this marks a milestone in the history of Murphy Beds.

It is about ten years ago, that I conceived and built the Hotel Birchmont, the first residential hotel with concealed beds erected in Chicago.

It is a note-worthy fact, that the Murphy Beds which you installed in Birchmont Hotel, have been in continuous use during this time and that I have had no expense for repairs. This had much to do with my selection of the same equipment for the Sherwin, and may be of interest to others considering equipment of this kind.

Very truly yours,

Vernon McGill

VMcG-JB

There's an old saying to the effect that "Time alone tells the goodness of man and things." If that is true what stronger endorsement could we offer as to the in-built ability of Murphy In-A-Dor Beds than the experience of Mr. Vernon C. McGill? Why experiment with any other bed when you know the Murphy will so successfully meet every concealed bed requirement?

Architect: WALTER W. AHLSCHLAGER

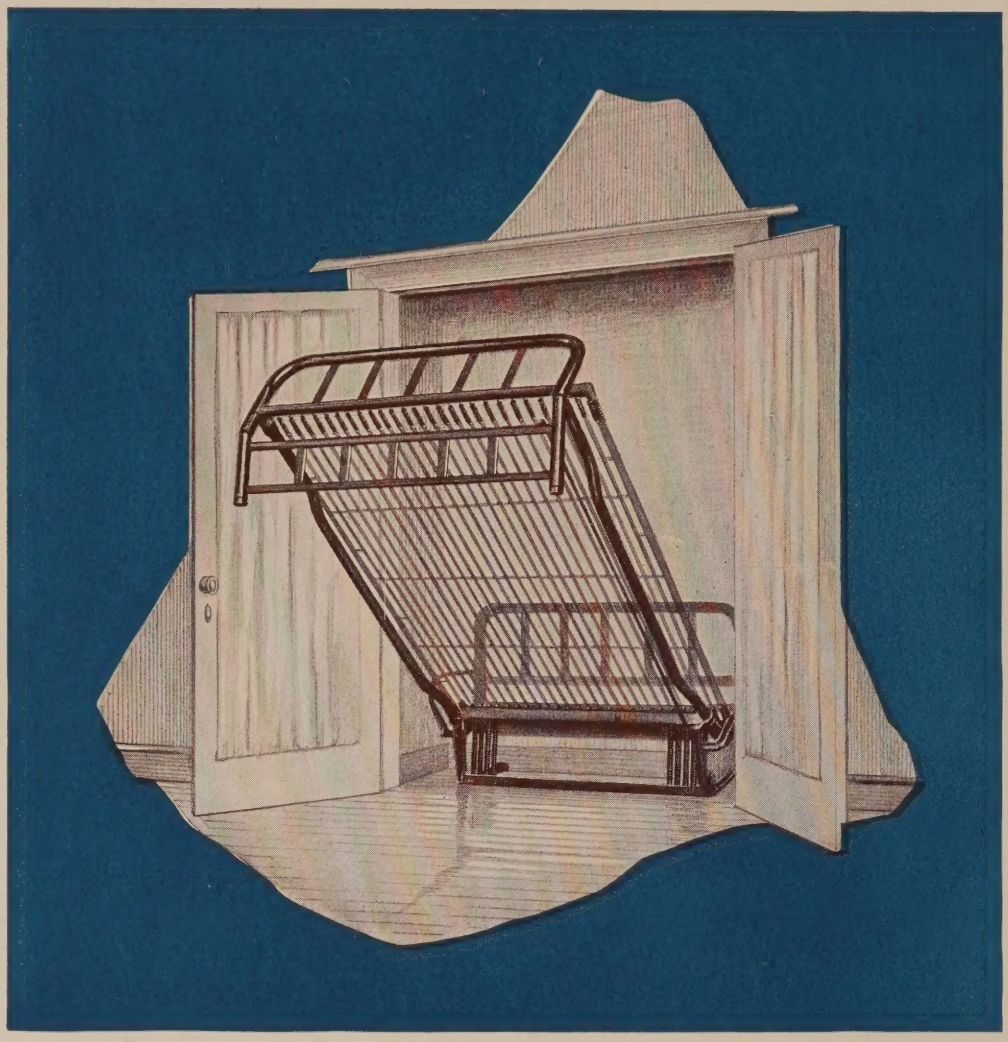

The Murphy In-A-Dor (Recess Type) Bed

Occupies Minimum of Space

FOR the Sun Parlor, Out-door Sleeping Porch and all other rooms where floor space is extremely limited and concealment is of secondary consideration, the Murphy (Recess Type) Bed is invaluable. It can be readily installed in old homes or apartments at small expense. Thousands of old apartments have been remodeled and modernized with these beds and quickly changed into profitable investments. In homes with open Sleeping Porches it provides complete protection to Bedding during the day, regardless of how stormy the weather, and a full size comfortable bed when lowered for use at night. It contains all the construction and comfort qualities that are built into the popular Murphy In-A-Dor (Pivot Type) Concealed Bed and requires a closet size of only 5′ 0″ wide by 1′ 7″ deep. Specifications and a practical floor plan application of this type of bed are shown on Plate 4 (opposite page). Note how it can be fit into space that is ordinarily wasted.

SPECIFICATION Nº 13

MURPHY RECESS BED

SHOWING MINIMUM CLOSET DIMENSIONS FOR STANDARD FULL SIZE BED 4'-6" x 6'-4" — INSIDE HEAD AND FOOT ENDS

Ⓐ DOORS WIDTH TWO 2'-6"
HEIGHT 7'-0"
FOR 6'-8" DOOR SEE NOTE SPEC H 1

Ⓓ DEPTH OF CLOSET 1'-7"
INSIDE PLASTER LINE TO OUTSIDE PLASTER LINE

Ⓔ BED CLEARANCE 7'-4"
BACK OF CLOSET TO FOOT END OF BED

LEGEND OF OTHER BED WIDTHS

BED WIDTH	DOORS WIDTH
4'-0"	2'-3"
3'-6"	2'-0"
3'-0"	1'-9"

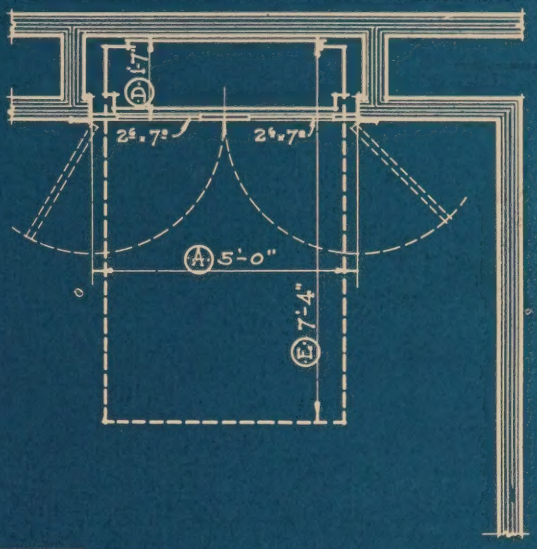

SEE APPLICATION OF THIS SPECIFICATION IN UNIT NUMBER 39

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION Nº 13

SHOWING WHERE RECESS BED CAN BE USED IN VERY SMALL CLOSET SPACE WITHOUT REDUCING SIZE OF SUN ROOM

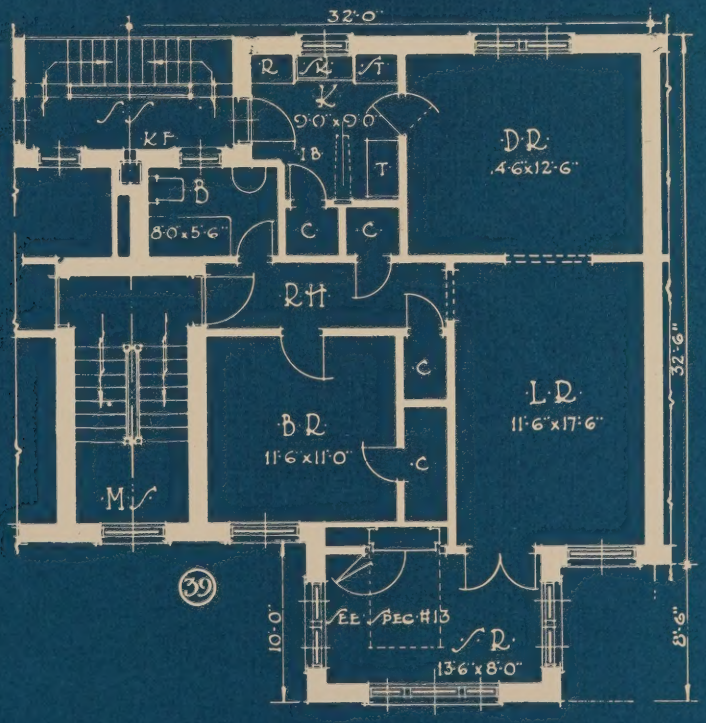

Specification No. 13, Recess Bed—Double Doors

(Illustrated with pictures—See Blue-Print Plate "4" preceding page)

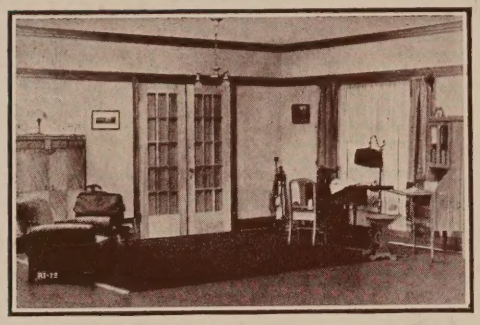

1—Doors closed

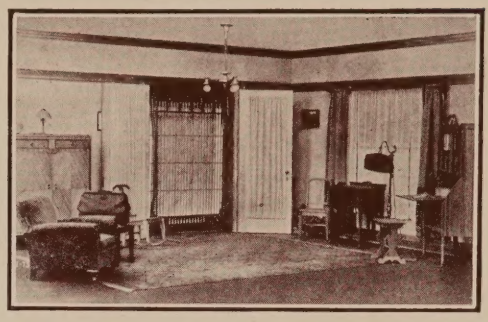

2—Doors open

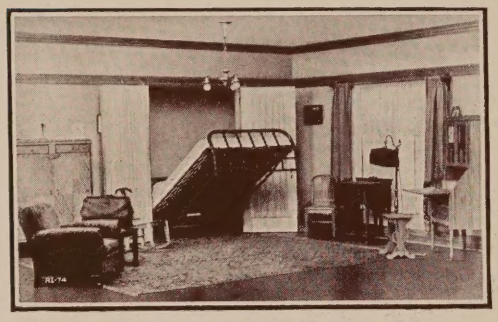

3—Bed part way down

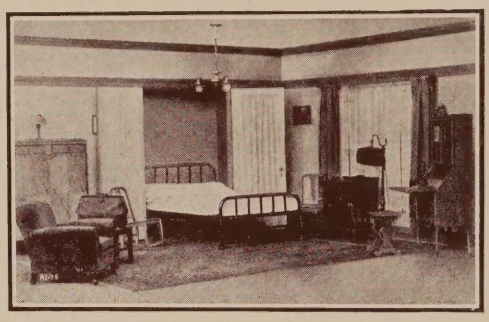

4—Bed on floor

The Murphy Canopy Bed

NOTE:—This is another application of the Recess Type as shown in specification No. 13. It requires no closet or recess—it is used on Sleeping Porches and in rooms where concealment is not essential.

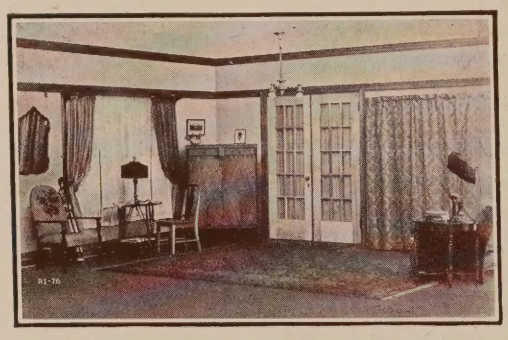

1—Drapes closed

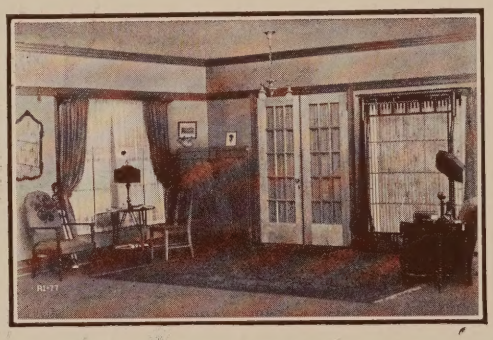

2—Drapes open

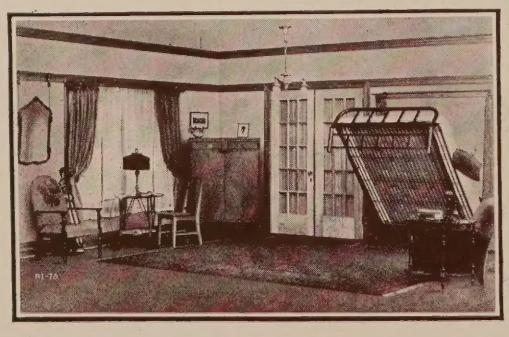

3—Bed part way down

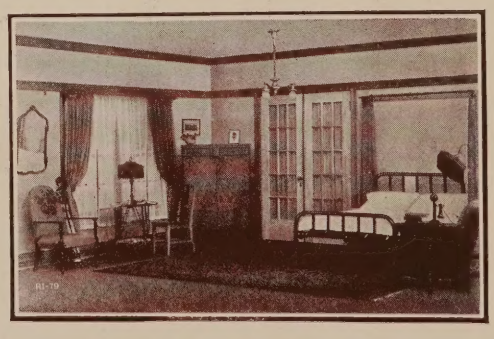

4—Bed on floor

An Attractive Duplex Bungalow Suggestion

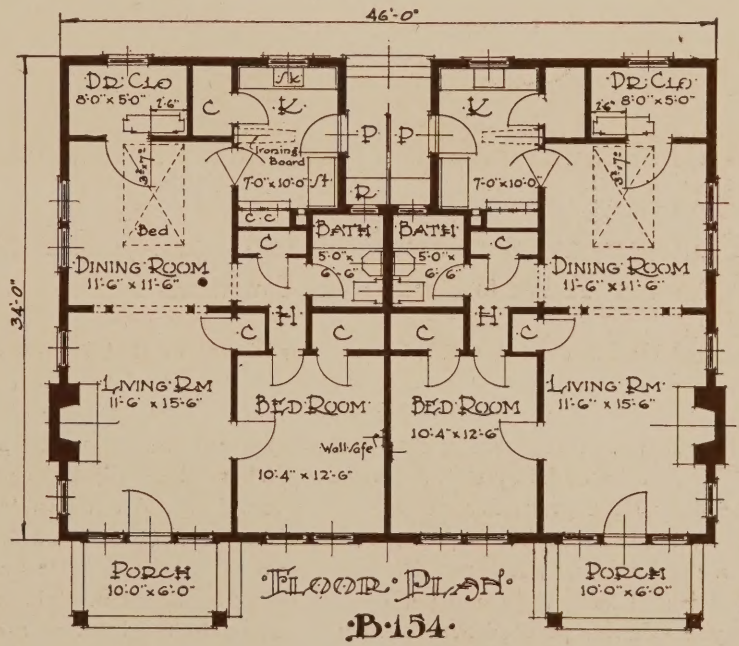

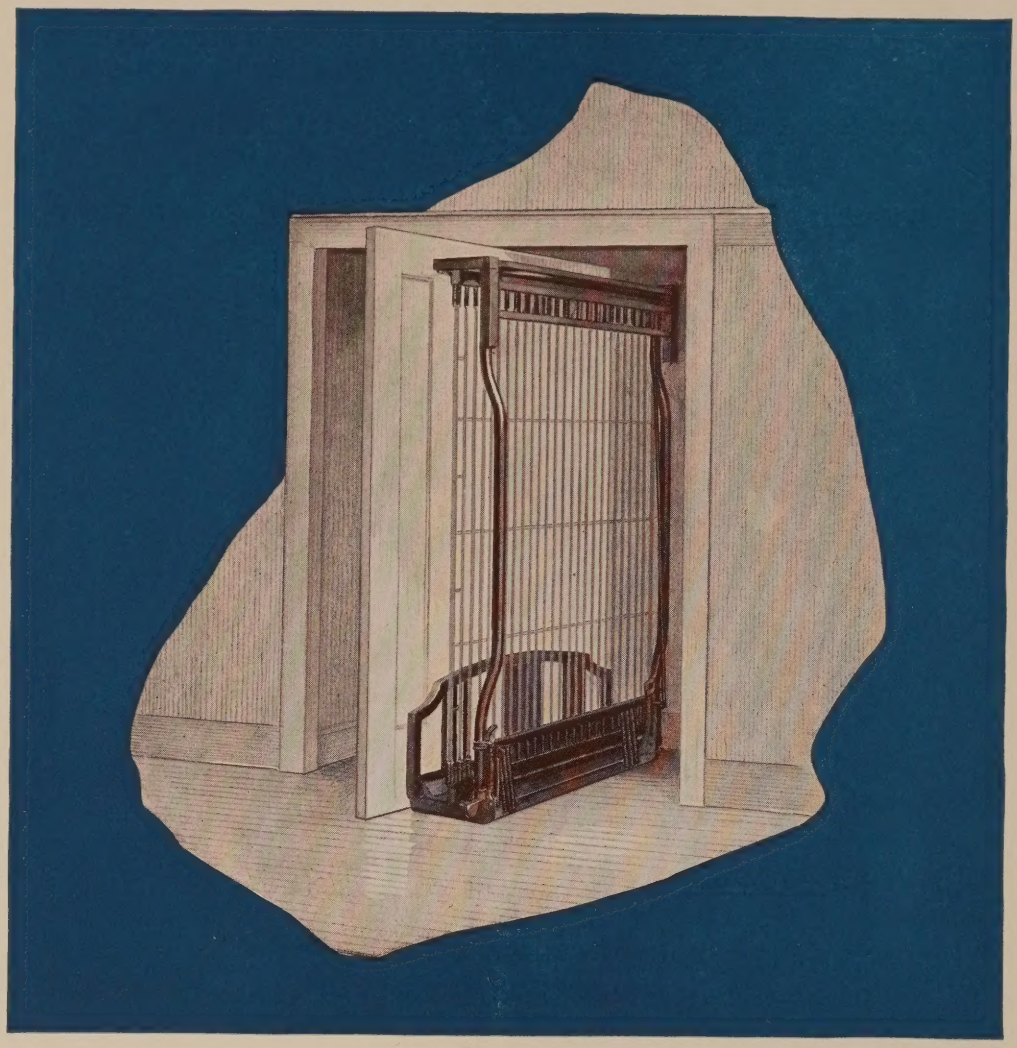

The Murphy In-A-Dor (Wide Door Type) Bed

A Bed to Meet Special Conditions

MURPHY In-A-Dor (Wide Door Type) of Bed is sold only to meet special requirements. Since the development of the Murphy In-A-Dor Closet and Recess type of Beds, which separate the bed entirely from the door and place all weight upon the floor, beds where the weight is carried by the door have gradually declined in favor. This decline in favor, however, is due to the better principle of installation, and not to a difference in mechanism. All types of Murphy Beds are of the same design and finish and have the same perfect balancing mechanism. The wide door type (Center pivoted arrangement) fastens to the back of a door 5′ 2″ wide, pivoted in the center. The wide door type (Off center pivoted arrangement) is used to meet special conditions. Specifications of this type of installation and a practical floor plan application are shown on Plate 5 (opposite page).

SPECIFICATION No. 11

WIDE DOOR OFF CENTER PIVOT INSTALLATION

SHOWING MINIMVM CLOSET DIMENSIONS FOR STANDARD FVLL SIZE BED 4'-6" x 6'-4" INSIDE HEAD AND FOOT ENDS

(A) DOOR — WIDTH 5'-0"
HEIGHT 7'-0"
FOR 6'-8" DOOR SEE NOTE SPEC #1

(D) DEPTH OF CLOSET 1' 9"
INSIDE PLASTER LINE TO OVTSIDE PLASTER LINE

(E) BED CLEARANCE 7'-6"
WALL TO FOOT END OF BED WHEN LOWERED IN ROOM

(I) DOOR CLEARANCE 2'-8"

NOTE SHOVLD DOOR BE PIVOTED ON CENTER THEN DEPTH OF CLOSET MVST BE 3'-0" TO PERMIT REVOLVING BED INTO ROOM

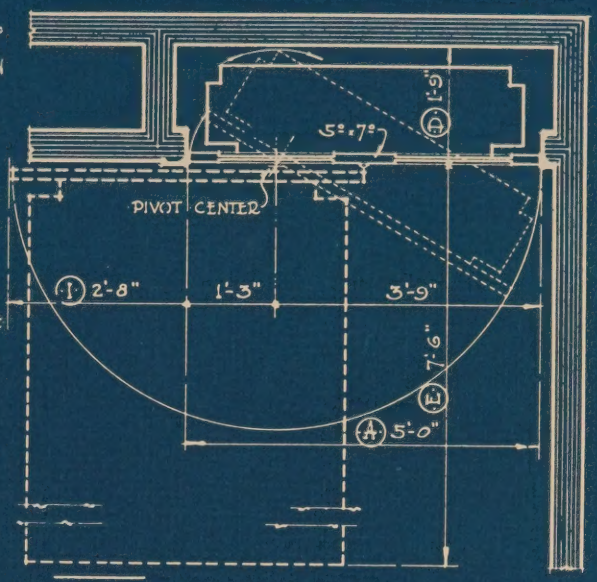

SEE APPLICATION OF THIS SPECIFICATION IN VNIT NVMBER 38-40

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION NO. 11

SHOWING HOW THE WIDE DOOR OFF CENTER PIVOT INSTALLATION ALLOWS THE BED TO BE LOWERED AWAY FROM WINDOWS AND GIVE ACCESS TO BOTH SIDES OF BED.

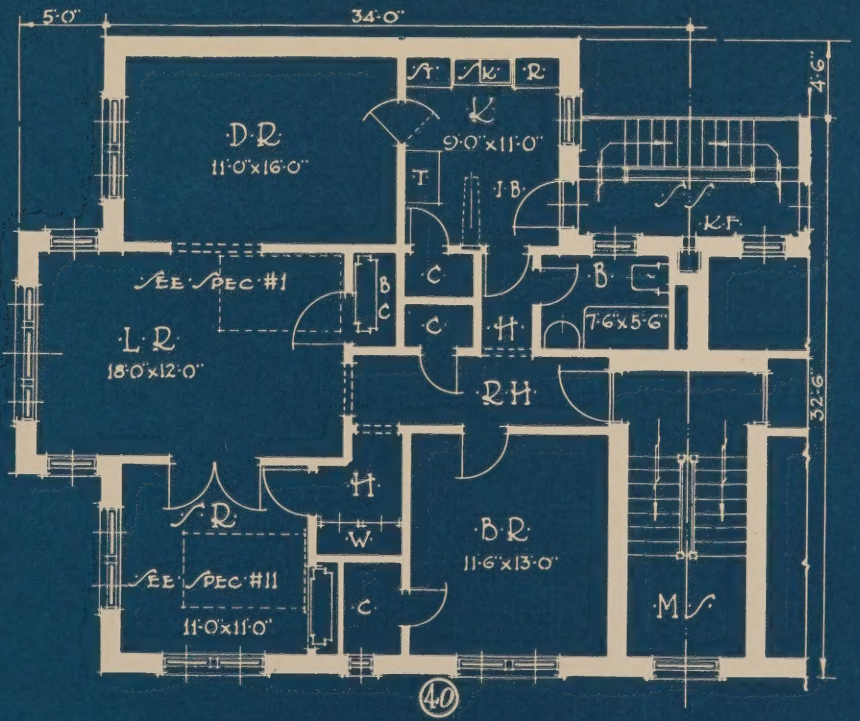

There's Only One "IN-A-DOR" Bed — The MURPHY

Specification No. 11, Wide Door Bed—Off Center Pivot

(Illustrated with pictures—See Blue-Print Plate "5" preceding page)

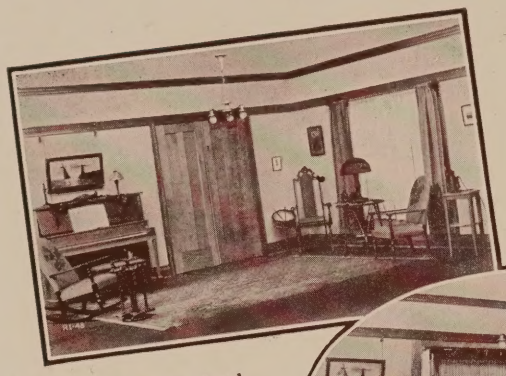

(1) Door closed.

(2) Bed ready to lower—note access to closet

(3) Bed on floor.

The South Shore View
Apartment Hotel

William G. Doerr of Chicago, Illinois
ARCHITECT

Construction of the building and selection of equipment and furnishings by Leipp & Lonergan, builders of high grade fireproof buildings.

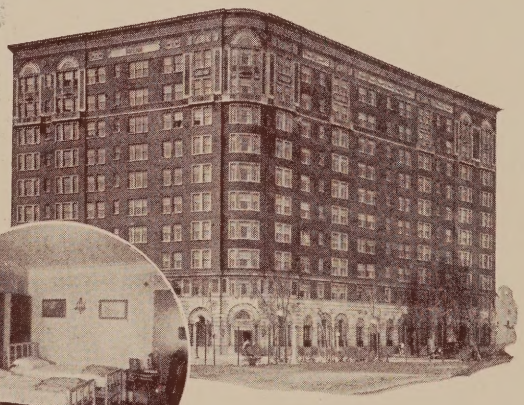



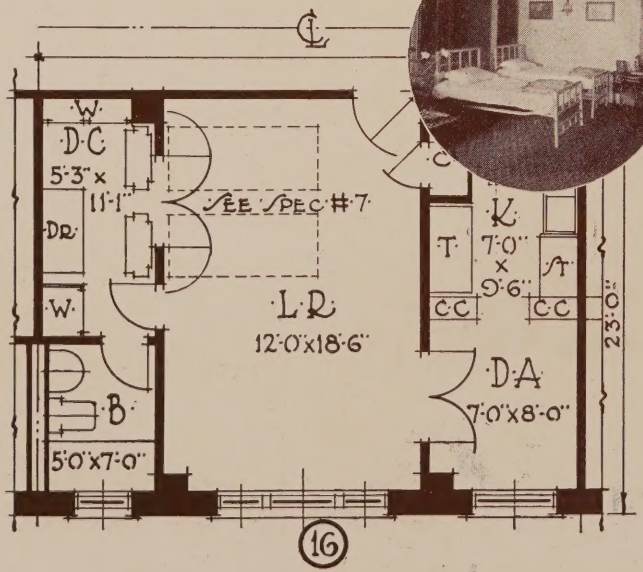

These are apartments that meet the needs of small families to good advantage, consisting of living room (with Murphy In-A-Dor Beds), bedroom, bath, dining room and kitchenette. Modern conveniences have been provided, such as running filtered ice water, mechanical refrigeration and electric sink dish-washing machines. Exterior as well as the interior is designed in the Adam Period. Ornamental polychrome terra cotta with brownish-red brick laid in white cement mortar presents a pleasing ensemble.

A Tribute to MURPHY *Equipment*

Pennsylvania Hotel Apartment

Philadelphia, Pa.

There are 160 housekeeping apartments and 140 hotel rooms in this beautiful and well designed 11-story Hotel Apartment. Because of its arrangement of accommodations, details of construction, size, luxury of furnishings, and standard of service the "PENNSYLVANIA" may truly be called "One of America's finest Hotel Apartments."

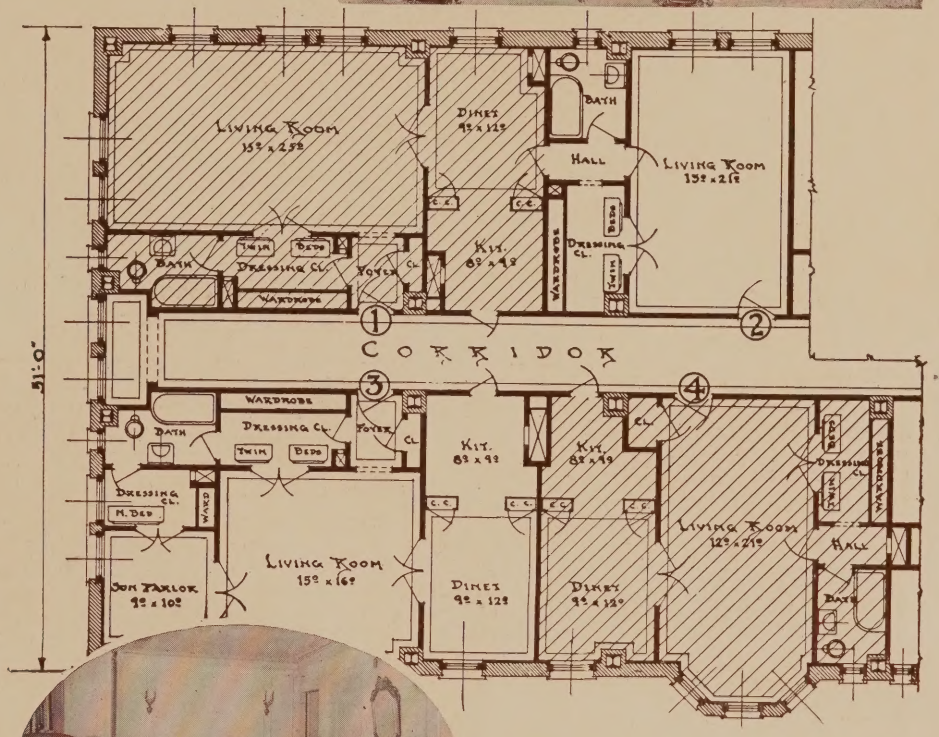

A unique feature is the arrangement of the bed closets so that it is possible to interchange the Murphy Beds from a full size to twin beds or vice versa, at the preference of each tenant — a valuable renting asset.

Architect:
CLARENCE WUNDER, Philadelphia, Pa.

A Tribute to MURPHY *Equipment*

Sam'l. Abraham & Sons, Architects and Builders
University City Mo.

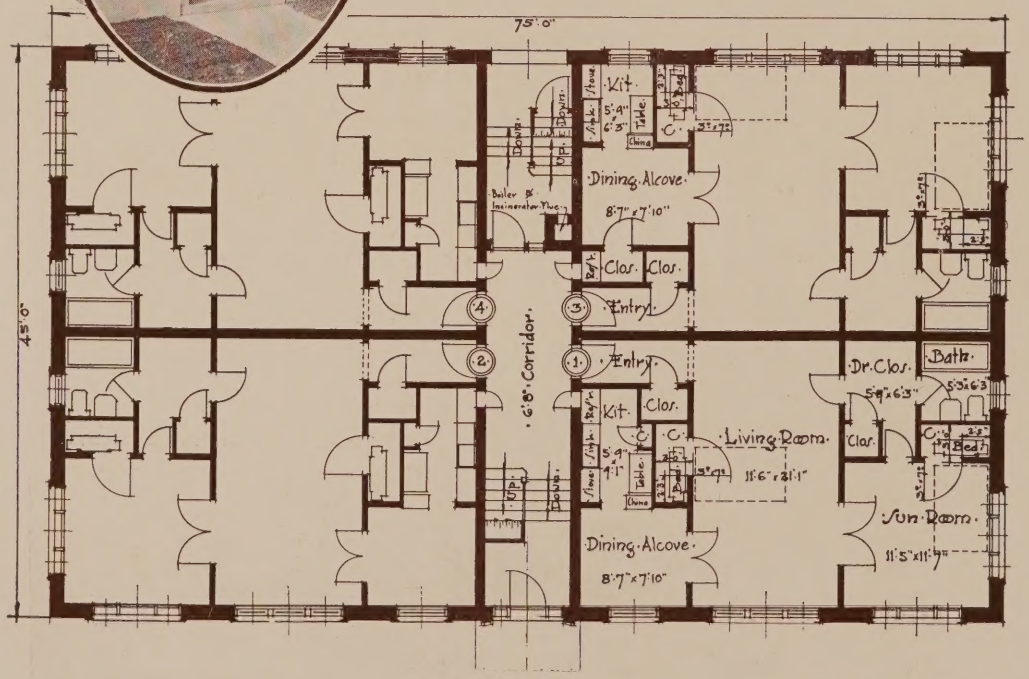

FLOOR PLAN

Your attention is called to the two suggestions for Kitchens—In Suite No. 1 the Kitchen is to the inside (as the above apartments were actually built). In Suite No. 3 the Kitchen is to the outside, allowing for the location of Bed Closet next to windows. An arrangement very popular in Southern States.

A Tribute to MURPHY *Equipment*

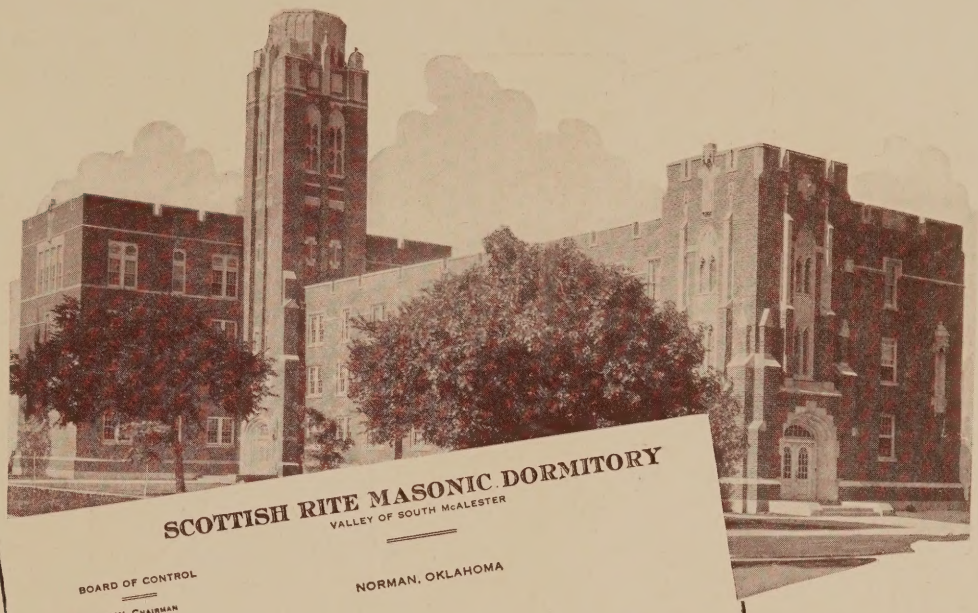

Scottish Rite
Masonic
Dormitory

—

Norman,
Oklahoma

SCOTTISH RITE MASONIC DORMITORY
VALLEY OF SOUTH McALESTER

BOARD OF CONTROL

H. L. MULDROW, Chairman
NORMAN
R. W HUTTO, Secretary
NORMAN
FRANK CRAIG
McALESTER

NORMAN, OKLAHOMA

February 3. 1922.

Murphy Door Bed Company,
St Louis, Missouri.

Gentlemen :

It is very gratifying to express our satisfaction of the service given by your beds. We installed one hundred twenty beds in our building, which is occupied entirely by boys; we have had absolutely no trouble although the beds have had the roughest possible use. They are comfortable, sightly, sanitary and satisfactory in all particulars.

I want to say also that the service rendered us by your organization has been of the highest order.

As we erect additional dormitories, we will specify Murphy beds as part of the regular equipment.

Very truly yours,

CHAIRMAN

HLM/W

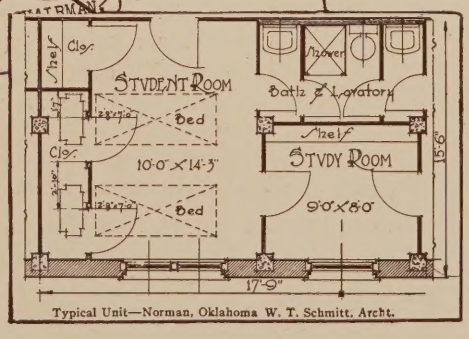

Typical Unit—Norman, Oklahoma W. T. Schmitt, Archt.

The floor unit (illustrated to the right) clearly shows the great advantage of Murphy Beds for Dormitories. The above installation consisted of 60 suites with 120 beds, giving maximum utility for each room. Murphy Beds permit the use of the entire room by day for study purposes or recreation, as well as sleeping quarters at night.

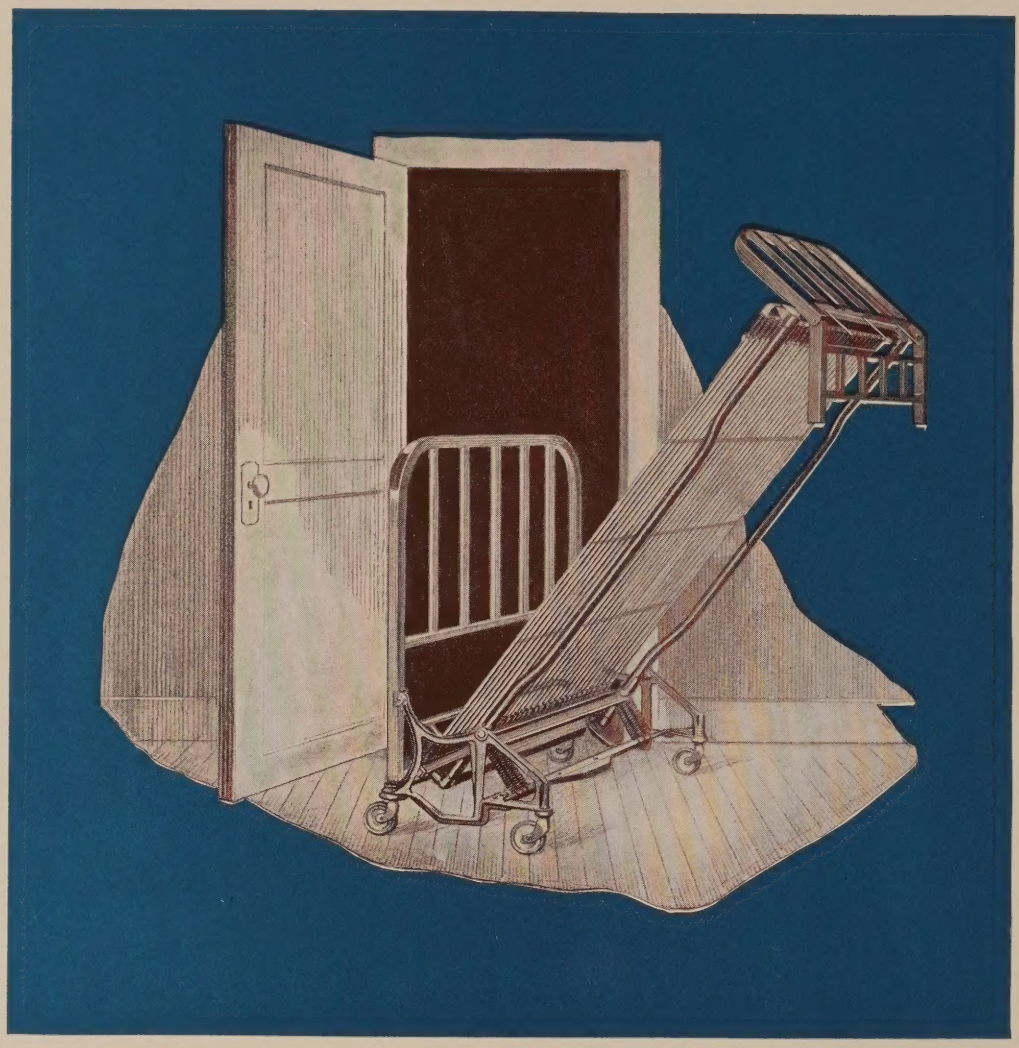

The Murphy In-A-Dor (Roller Type) Bed

A Portable Convenient Bed

HOMES already built do not need expensive alterations to enjoy the convenience of Murphy Concealed Beds. The Murphy Portable (Roller Type) Bed can be concealed in either a narrow deep closet or a wide shallow one and practically every home has closet space of the right size. With one of these beds the arrival of unexpected guests never cause the embarrassing position of being without an extra bedroom. Just roll the Murphy Portable Roller Bed out of its closet into any convenient room and take care of guests at any time. It is constructed to give solid comfort and, like all Murphy Beds, has a world-wide reputation for its practicability, durability and appearance because it's a Murphy Product. Substantial, good-looking Rubber Tired Castors are used on all Murphy Portable Beds.

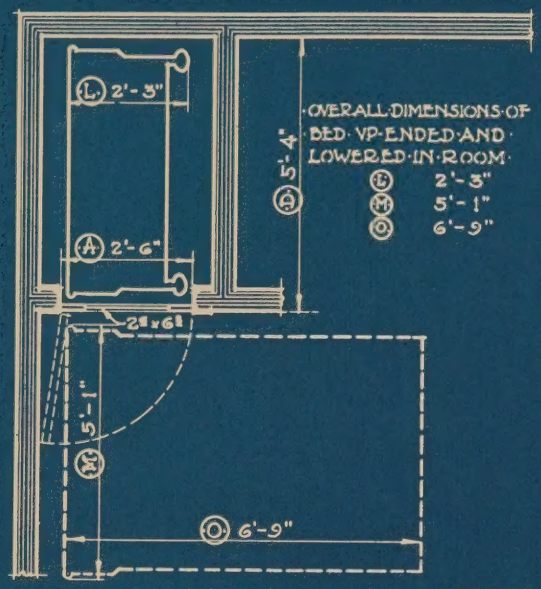

OVERALL DIMENSIONS OF BED VP ENDED AND LOWERED IN ROOM

L	2'-3"
M	5'-1"
O	6'-9"

SPECIFICATION No. 12

MURPHY ROLLER BED

SHOWING MINIMUM CLOSET DIMENSIONS FOR MURPHY ROLLER BED

A STANDARD FULL SIZE BED 4'-6" WIDE 6'-4" LONG ⟵ INSIDE HEAD AND FOOT ENDS

ACCOMODATING STANDARD MATTRESS

A DOOR	WIDTH	2'-6"
	HEIGHT	6'-8"
D DEPTH OF CLOSET		5'-4"

INSIDE PLASTER LINE TO OUTSIDE PLASTER LINE

NOTE

WHEN NECESSARY TO INSTALL ROLLER BED IN RECESS TYPE CLOSET SPECIFY:-

DOOR OPENING	5'-4"
DEPTH OF CLOSET	2'-6"

INSIDE PLASTER LINE TO OUTSIDE PLASTER LINE

SEE APPLICATION OF THIS SPECIFICATION IN UNIT NUMBER 37

PRACTICAL (FLOOR PLAN)

APPLICATION OF SPECIFICATION No 12

SHOWING HOW ROLLER BED CAN BE FIT INTO A VERY SMALL CLOSET SPACE WHERE LARGE RECESS SPACE IS NOT AVAILABLE

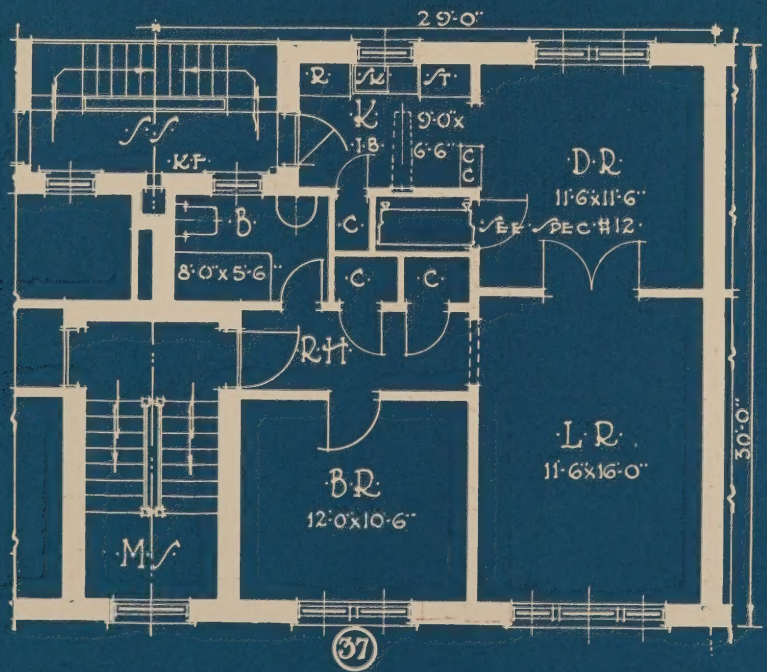

Specification No. 12, Murphy Roller Bed

(Illustrated with pictures—See Blue-Print Plate "6" preceding page)

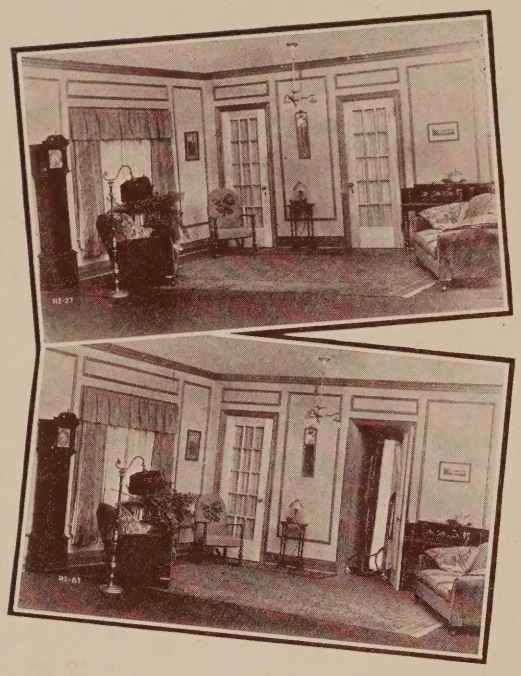

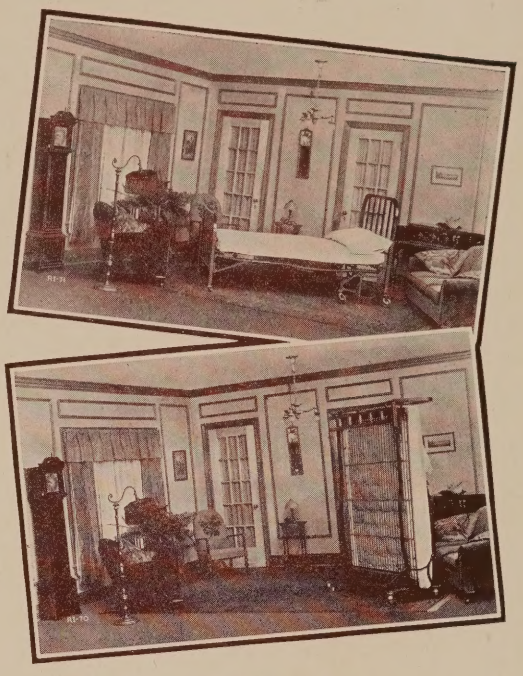

1—(Upper) Door closed
2—(Lower) Door open

3—(Lower) Bed ready to lower
4—(Upper) Bed on floor

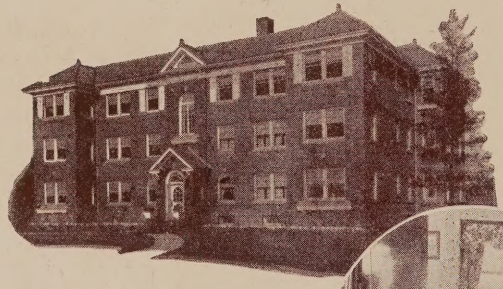

The Highland Arms Apartments

of Rockford, Illinois

Because of the highly efficient and economical arrangement of its floor plan, this building has proven a very popular and profitable apartment. Mr. Nordval, owner and builder, believes in giving tenants real accommodations—not just rooms.



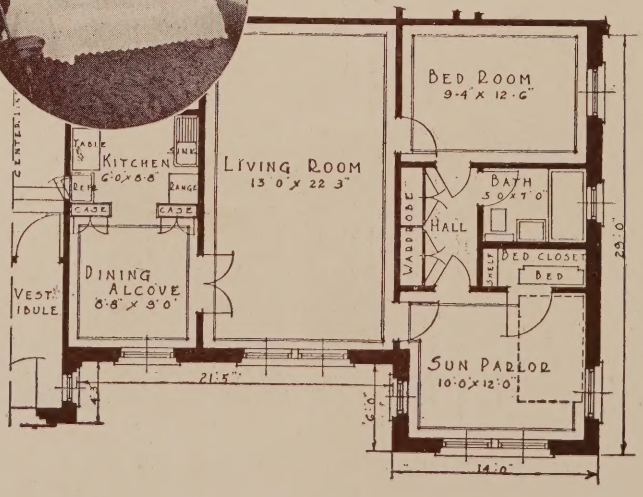

Just observe the many unusually convenient features of these apartments. Note how the Murphy In-A-Dor Bed (Pivot Type) makes the Sun Room an ideal sleeping room—yet by day allows for real living comfort. The location of bath room insures privacy — free access from Bedroom and Sun Room when both are in use for sleeping purposes. The spare wardrobe, in addition to the closet, furnish ample clothes storage facilities. The complete compactness of this unit is exceptional.

Architect
JORMERE DAVIS
Milwaukee, Wis

A Tribute to MURPHY *Equipment*

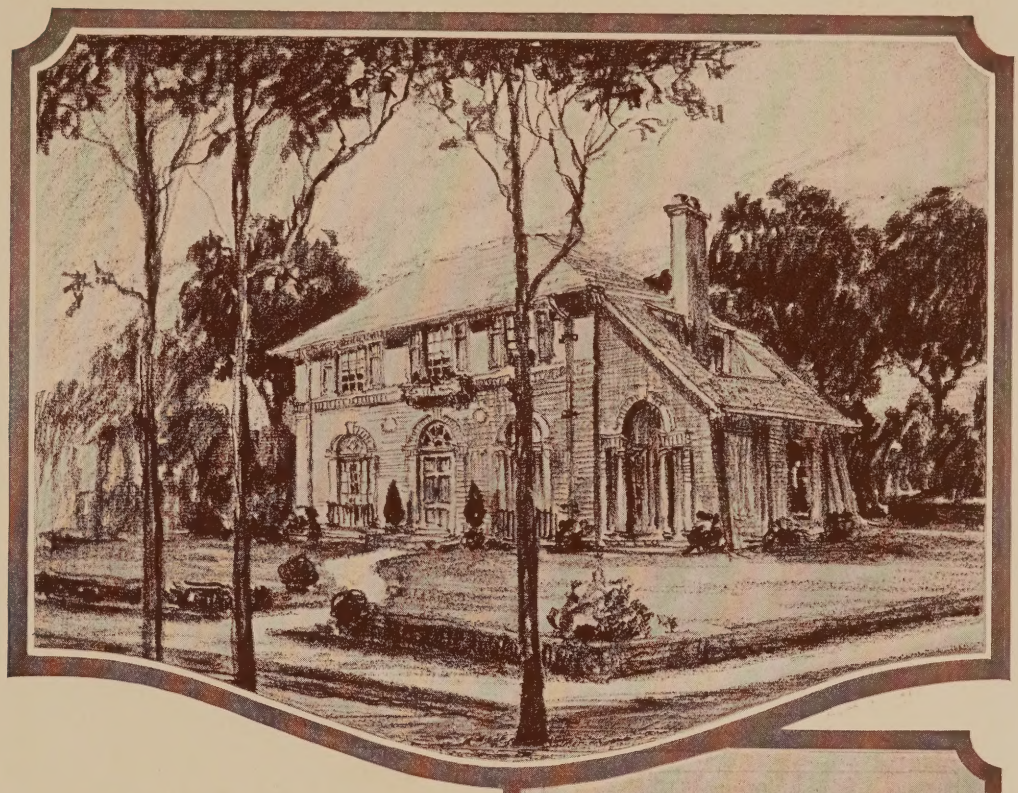

A Complete Murphyized Home — with Murphy Twin IN-A-DOR Beds, Ironing Board, Medicine Cabinets, Linen Case and Steel Kitchen Equipment.

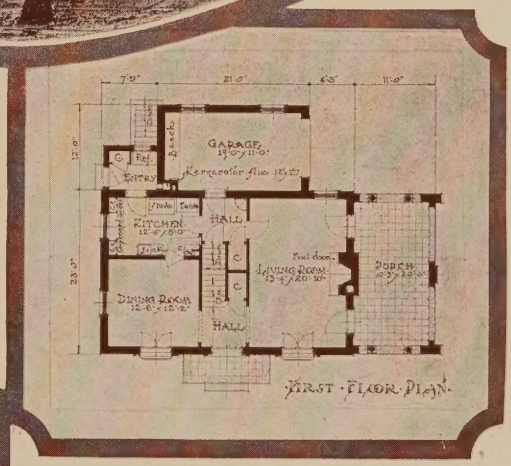

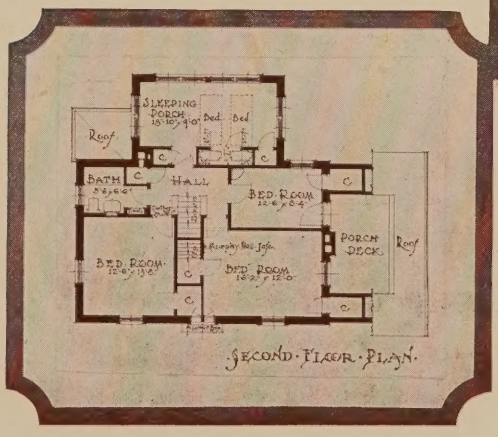

This Home built by

The Hamley Realty Co.,

University City, Missouri

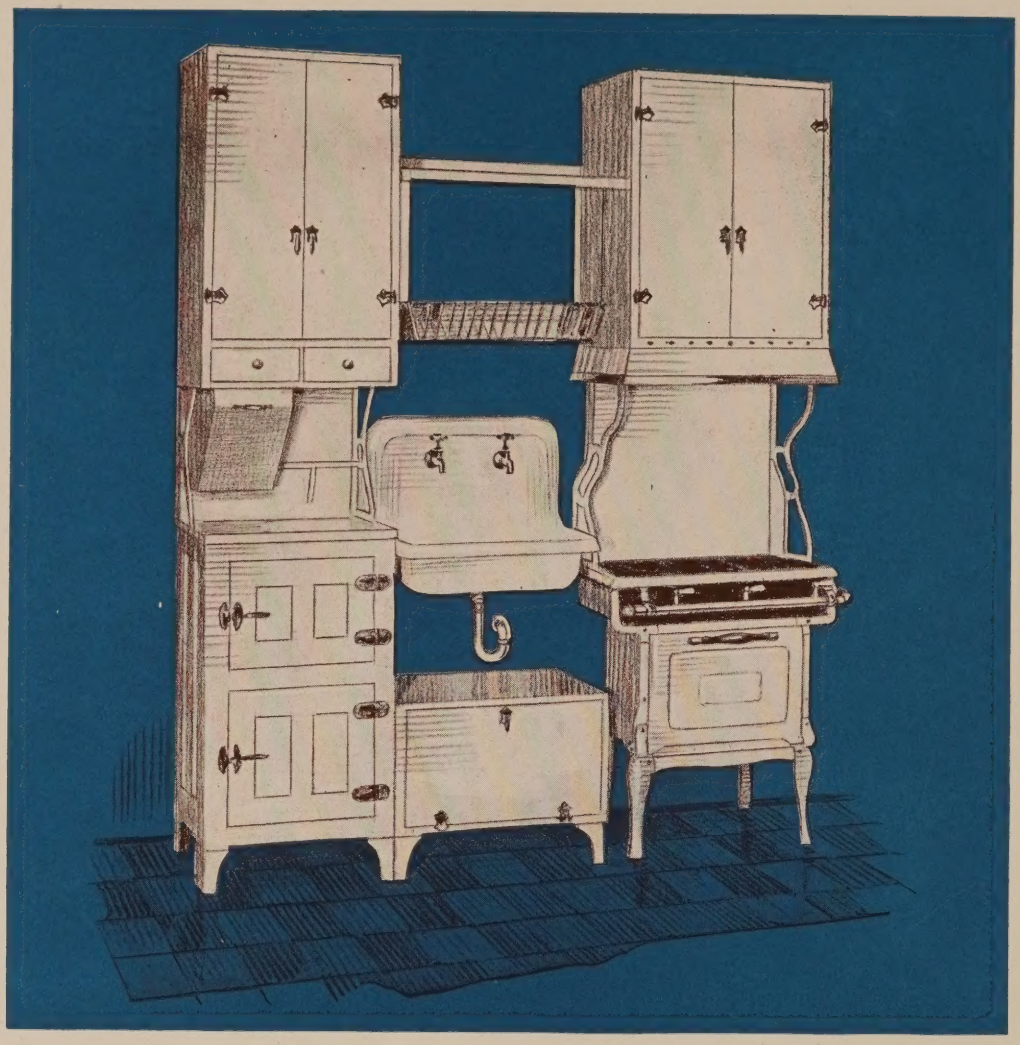

Complete Assembly of Units Ref 120, P.C., S.D.B., S.T. 30

REFRIGERATOR

Unit REF—120.

SECTION—REF—C—20 Refrigerator Cabinet.
Double paneled doors (muffled).
Two cutlery drawers on V. F. slides.
Rust resisting nickeled hardware.
Baked enamel, white or French gray.
Stretcher leveled, furniture steel.

SECTION REF—20 Refrigerator—wood.
Porcelain work top.
Side or rear icing.
Cast brass nickel plated hardware.
Wire shelf.
50 lb. ice capacity.
Drain seal.

SHIPPING WEIGHT,

Section REF—C—20	115 lbs.
Section REF—20	115 lbs.
Total	230 lbs.

SHELF & DRAIN BASKET

Unit S. D. B.—Shelf & Basket

White or French gray enamel furniture steel.
Holes on both ends of shelf to bolt to refrigerator and stove cabinets.
Galvanized wire basket with center wire plate supports.
Four enameled steel basket hangers.

PAN CABINET

Unit P. C.—Pan Cabinet

Rust resisting nickel plated hardware.
Double paneled door (muffled).
Baked enamel, full pickled furniture steel.

This cabinet must clear under sink trap.

SHIPPING WEIGHT,

Unit S. D. B.	8 lbs.
Unit P. C.	50 lbs.
Total	58 lbs.

THREE BURNER STOVE

Unit S. T.—30

SECTION 3—B. C. Three burner range cabinet.
Equipped with oven and room vent.
Nickel plated trim for white or gray stove.
Black enamel trim for black stove.
Heavy cast iron cabinet support brackets.
Double paneled doors (muffled).
Stove canopy.

SECTION 3—B. Three burner range.
Oven size 12″ high, 12″ deep, 18″ wide.
Black enameled with white porcelain door panel.
White or gray porcelain enameled range.
Supplied with or without broiler.

SHIPPING WEIGHT,

Section 3—B. C.	130 lbs.
Section 3—B.	93 lbs.
Total	223 lbs.

NOTE:—Refer to blue-print plate Nos. 8—9—10 for detail drawing of this unit and complete assembly.
(Open opposite folded page)

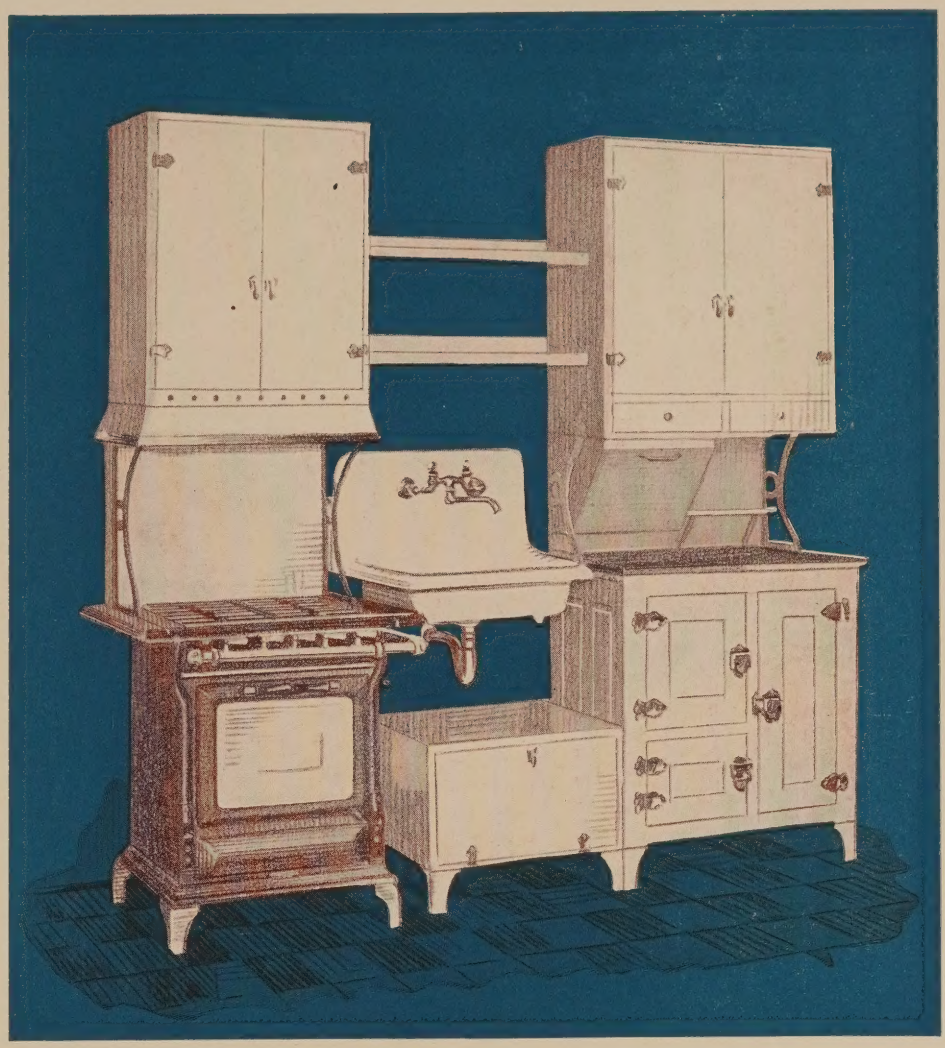

Complete Assembly Units, ST-40, Double Shelves P.C. Ref. 130

FOUR BURNER STOVE

Unit S. T.—40

SECTION 4—B. C. Four burner stove cabinet.
Equipped with oven and room vent.
Nickel plated trim for white or gray stove.
Black enamel trim for black stove.
Heavy cast iron cabinet brackets.
Double paneled doors (muffled).
Stove canopy.

SECTION 4—B. Four burner stove.
Oven size 12" high, 18"deep, 16" wide.
Black enameled with white porcelain door.
White or gray porcelain enameled stove.
Supplied with or without broiler, simmer, or automatic lighter.
"Wilder" rust-resisting oven linings.

SHIPPING WEIGHT

Section 4—B. C.	130 lbs.
Section 4—B.	163 lbs.
Total	293 lbs.

DOUBLE SHELVES

Standard size 12" deep, 19½", 21½" or 25½" long.
1" face channel in front.
Length, 1½" wider than sink size.
Baked enamel, white or French gray.
Holes on both ends to bolt to refrigerator cabinet and stove cabinet.

PAN CABINET

Unit P. C.

Rust resisting copper and nickel plated hardware.
Double paneled doors (muffled).
Baked enamel, white or French gray.
Stretcher leveled, full pickled furniture steel.
This cabinet must clear under sink trap.

SHIPPING WEIGHT,

Unit P. C.	50 lbs.

REFRIGERATOR

Unit REF—130

SECTION REF—C. 30 Refrigerator cabinet.
Double paneled doors (muffled).
Rust resisting copper and nickel plated hardware.
Heavy cast cabinet support brackets.
Tin lined bread box with wire shelf.
Tin lined flour bin.
Two cutlery drawers.
Baked enamel, white or French gray.

SECTION REF—30 Refrigerator (wood).
Can be equipped with automatic refrigeration.
Cork lined.
Side or rear icing.
Cast brass and nickel plated hardware.
Wood or porcelain work top.

SHIPPING WEIGHT,

Section REF—C. 30	165 lbs.
Section REF—30	195 lbs.
Total	360 lbs.

NOTE:—Refer to blue-print plate Nos. 8—9—10 for detail drawing of this unit and complete assembly.
(Open opposite folded page)

MURPHY DOOR BED CO.

TECHNICAL DEPT *PLATE 7*

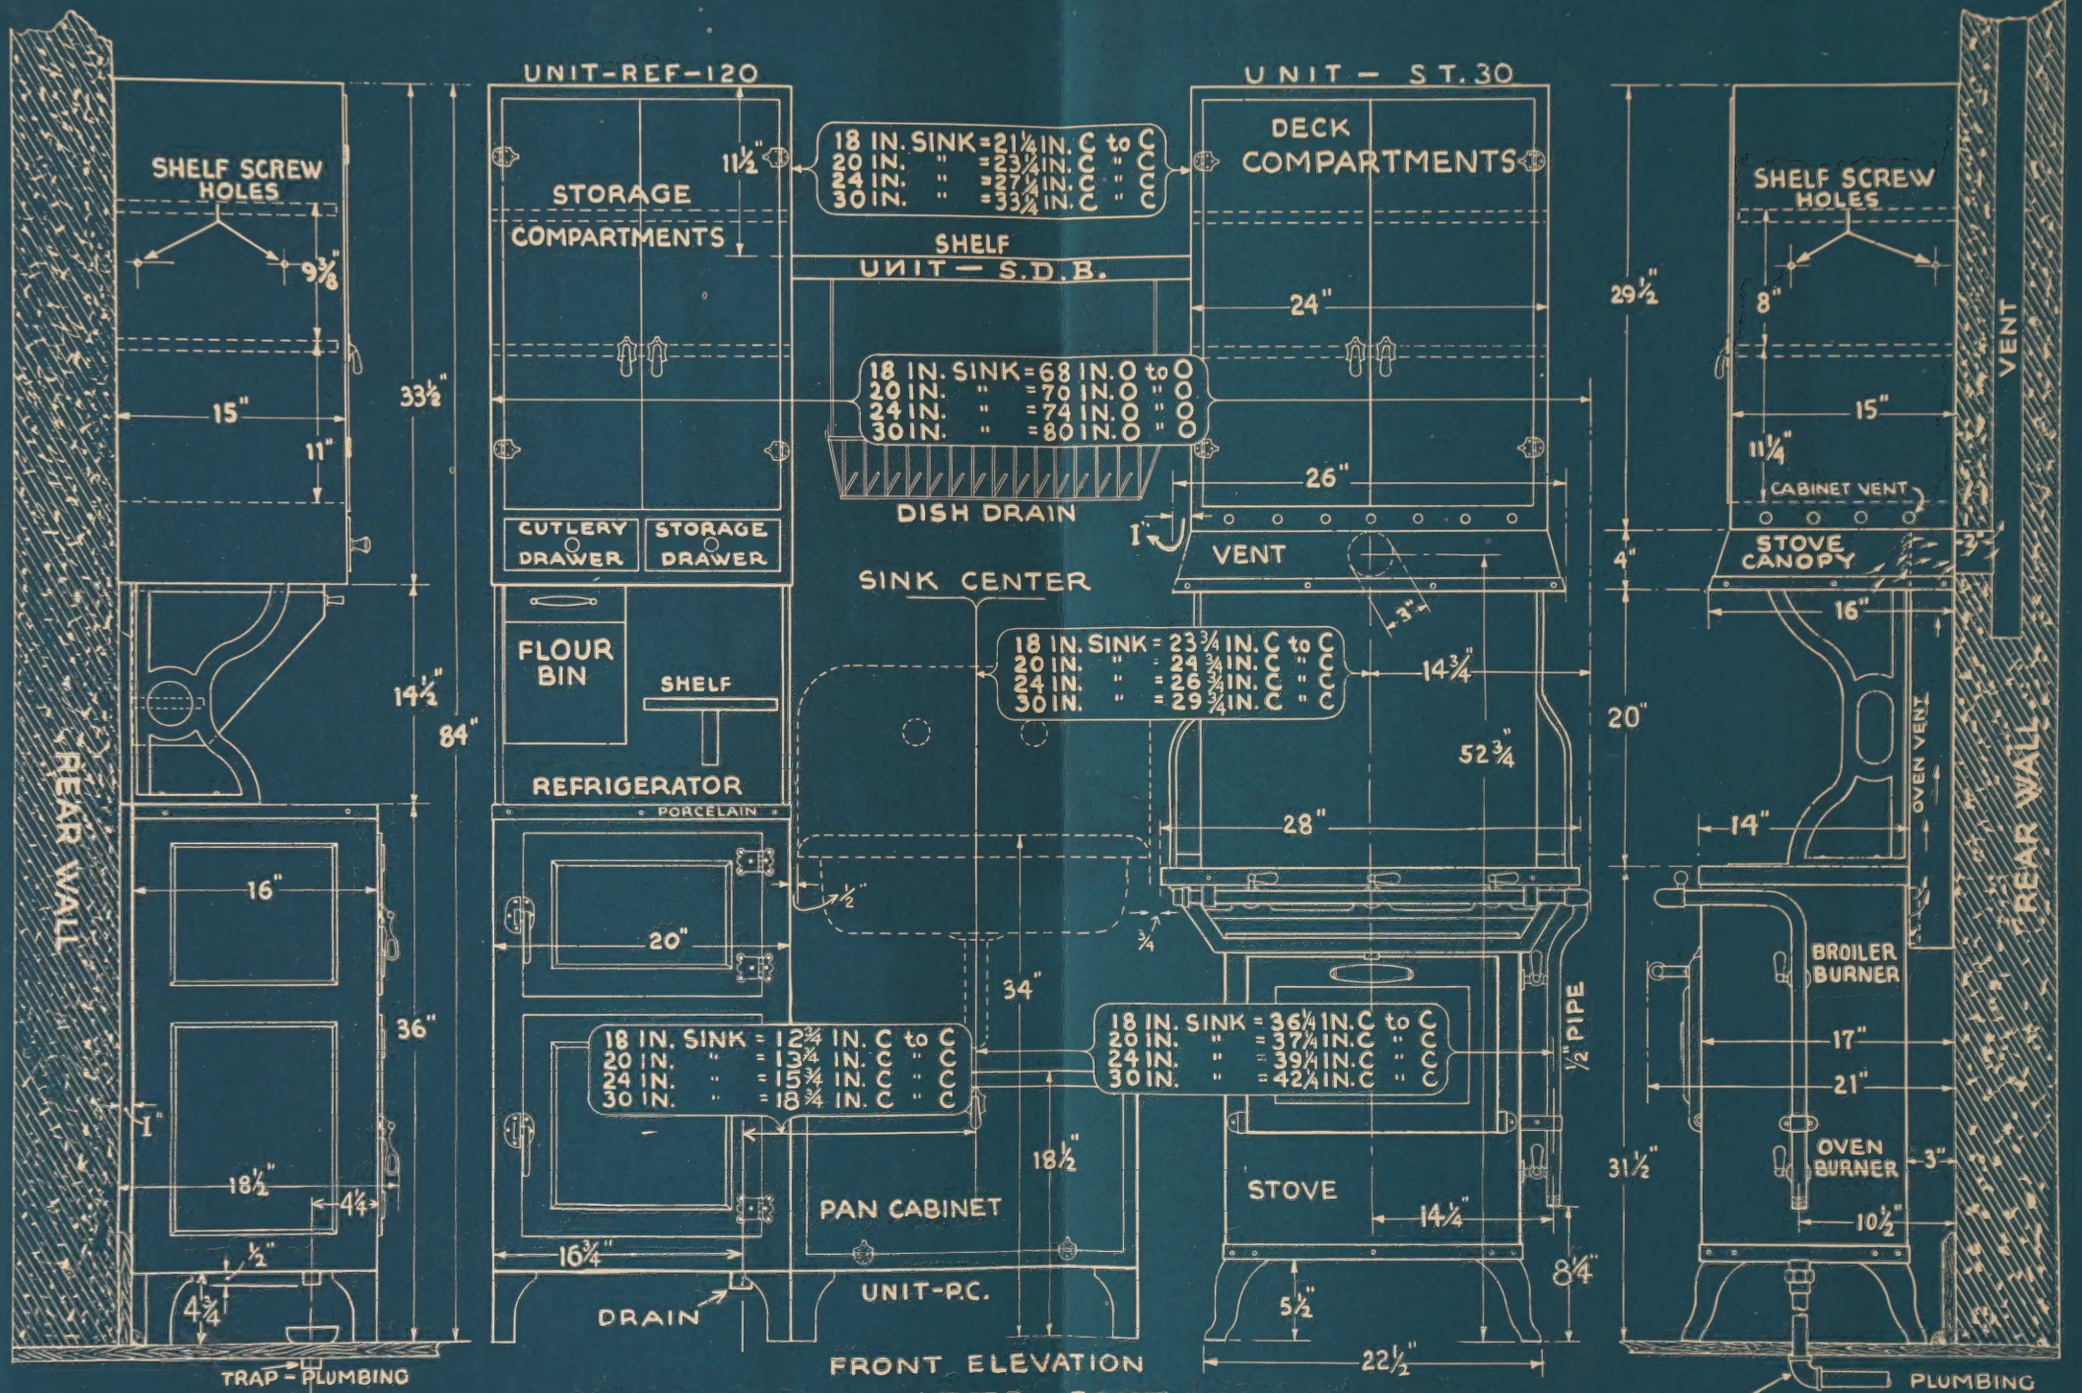

REFRIGERATOR SECTION

MURPHY STEEL KITCHENETTE

STOVE SECTION

There's Only One "IN-A-DOR" Bed — The MURPHY

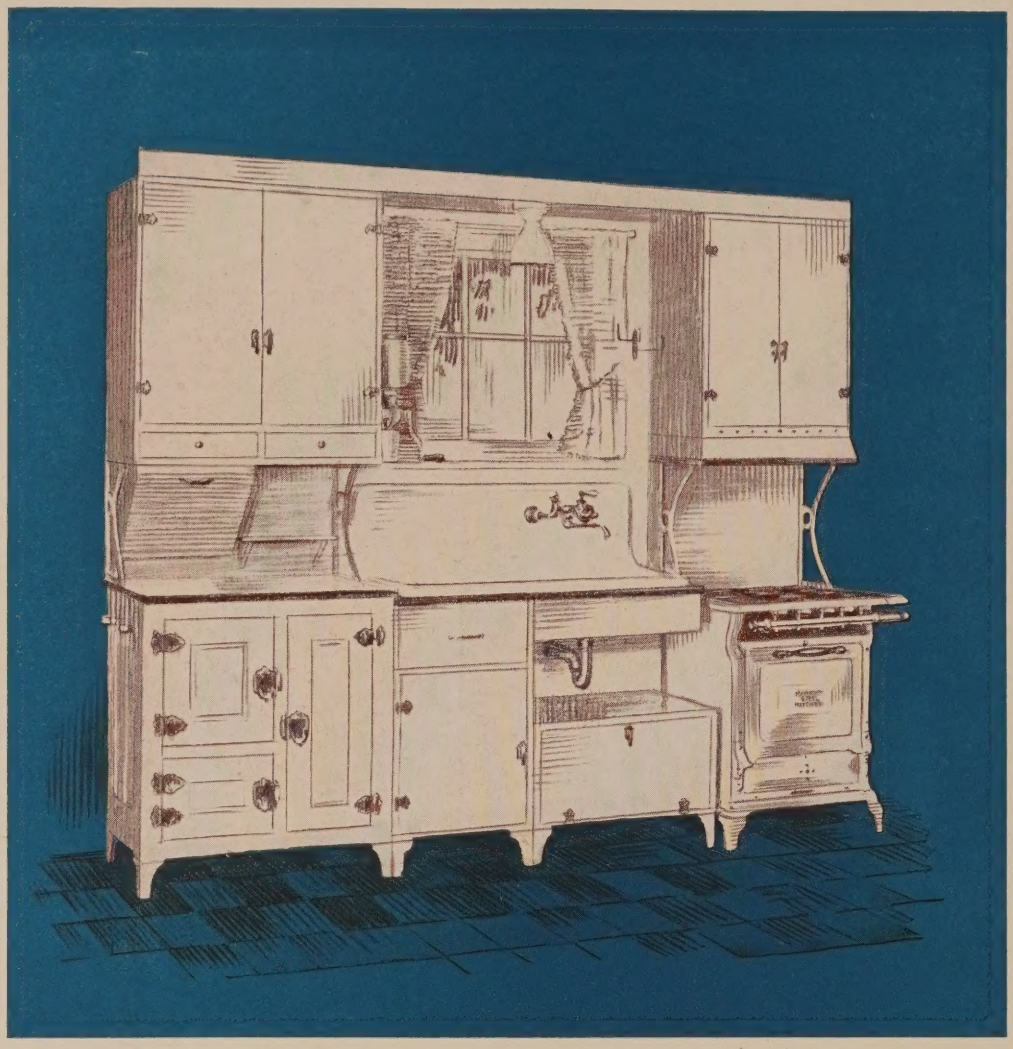

Complete Assembly of Units Ref. 130, D.B., P.C., ST.-40

REFRIGERATOR

Unit REF—130

SECTION REF—C. 30 Refrigerator cabinet.
Double paneled doors (muffled)
Rust resisting copper and nickel plated hardware.
Heavy cast cabinet support brackets.
Tin lined bread box with wire shelf.
Tin lined flour bin.
Two cutlery drawers.
Baked enamel, white or French gray.

SECTION—REF—30 Refrigerator (wood).
Can be equipped with automatic refrigeration. Cork lined.
Side or rear icing.
Cast brass and nickel plated hardware.
Wood or porcelain work top.

SHIPPING WEIGHT

Section REF—C. 30	165 lbs.
Section REF—30	195 lbs.
Total	360 lbs.

PAN CABINET

Unit P. C.

Rust resisting copper and nickel plated hardware.
Baked enamel, white or French gray.
Stretcher leveled, full pickled furniture steel.
This cabinet must clear under sink trap.

SHIPPING WEIGHT

Unit P. C.	50 lbs.

DRAIN BOARD CABINET

Unit D. B.

One drawer on V. F. slides.
Double paneled door (muffled).
Rust resisting and nickel plated hardware.
Baked enamel, white or French gray.
Stretcher leveled furniture steel.

SHIPPING WEIGHT,

Unit D. B.	80 lbs.

FOUR BURNER STOVE

Unit S. T.—40

SECTION 4—B. C. Four Burner stove cabinet.
Equipped with oven and room vent.
Nickel plated trim for white or gray stove.
Black enamel trim for black stove.
Heavy cast iron cabinet brackets.
Double paneled doors (muffled).
Stove canopy.

SECTION 4—B. Four burner stove.
Oven size 12″ high, 18″ deep, 16″ wide.
Black enameled with white porcelain door.
White or gray porcelain enameled stove.
Supplied with or without broiler, simmer or automatic lighter.
"Wilder" rust-resisting oven linings.

SHIPPING WEIGHT,

Section 4—B. C.	130 lbs.
Section 4—B.	163 lbs.
Total	293 lbs.

NOTE:—Refer to blue-print plate Nos. 8—9—10 for detail drawing of this unit and complete assembly.
(Open opposite folded page)

A Tribute to MURPHY *Equipment*

An Unusual Arrangement

NOTE that the center tier of apartments (No. 2) is one-half story higher than the two outside tiers (No. 1 and No. 3). Note also that one main and one rear stairway serves two tiers of apartments not on the same level. The location of main stairway serving tiers (No. 2 and No. 3) in the center of the plan makes it possible to get court frontage for center tier (No. 2). This stairway occupies space otherwise difficult to use to advantage. By this arrangement a commodious lobby is possible on grade level, serving both main stairways. The general height of the building is held to three stories, while the exterior is different and attractive.

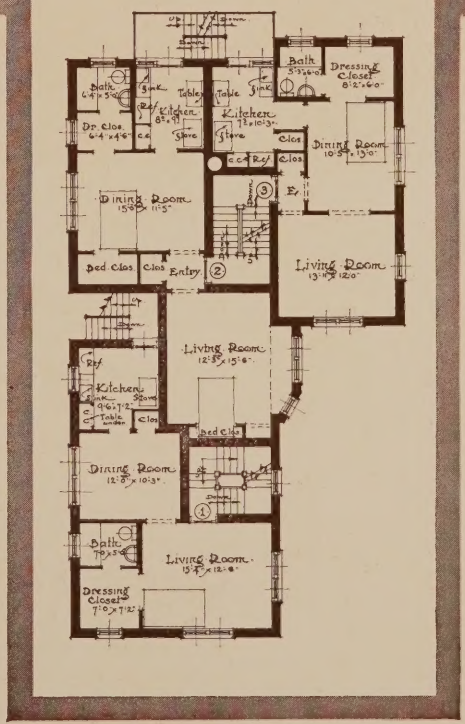

Architect and Builder:
SOL. ABRAMS & SON,
University City, Mo.

MURPHY DOOR BED CO.

TECHNICAL DEPT *PLATE 8.*

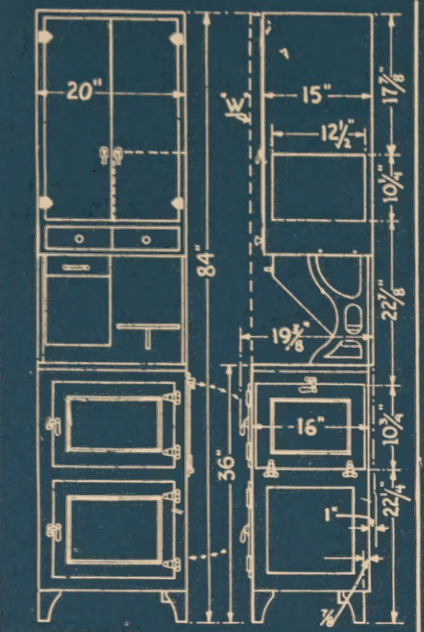

UNIT REF-120
SERVICE COMPARTMENT AND REFRIGERATOR DRAIN LOCATION
"W" SIDE METAL WALL FOR FULL SIZE SERVICE AND ICE DOOR

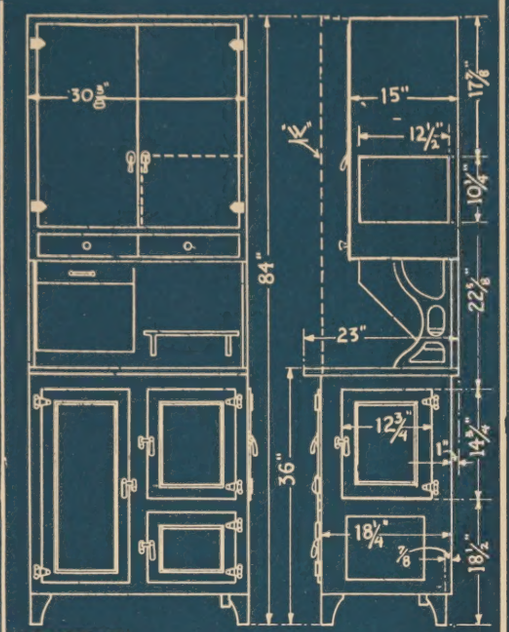

UNIT REF-130
SERVICE COMPARTMENT AND REFRIGERATOR DRAIN LOCATION
"W" SIDE METAL WALL FOR FULL SIZE SERVICE AND ICE DOOR

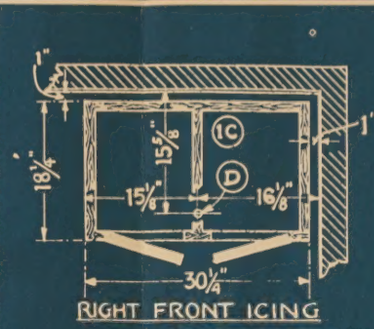

RIGHT FRONT ICING

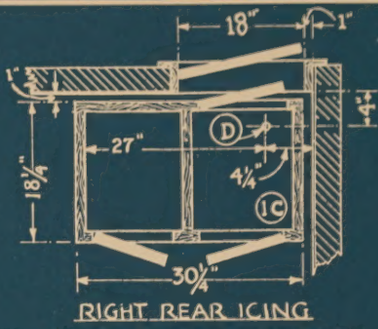

RIGHT REAR ICING

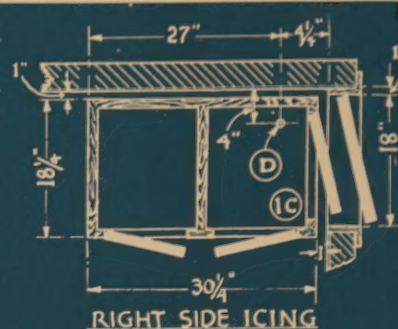

RIGHT SIDE ICING

FLOOR PLAN OF 30" REFRIGERATOR, SECTION REF-30 FOR UNIT REF-130



LEFT FRONT ICING

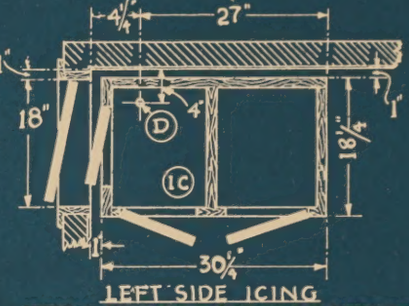

LEFT SIDE ICING

LOCATION OF DRAIN PIPE IN FLOOR MUST BE DETERMINED BY THE DESIGN AND SIZE OF DRAIN BOWL, YOU CAN LOCATE BOWL EDGE 2" IN FROM OUTER EDGE OF REFRIGERATOR.

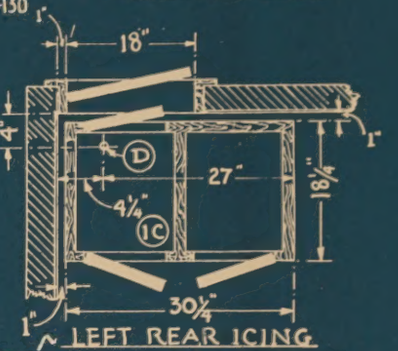

LEFT REAR ICING

I.C. (ICE CHAMBER)
D. (DRAIN LOCATION IN REFRIGERATOR ONLY)

ICE DOOR OPENING 12¾" X 14¾".

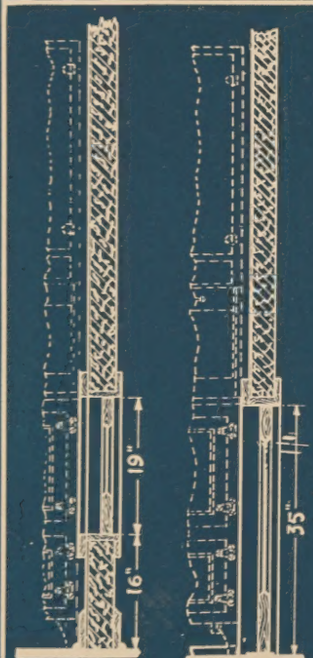

SIDE OR REAR ICING DOOR ONLY.

SIDE OR REAR FULL SIZE ICING DOOR ONLY.

SIDE OR REAR WORK BOARD SERVICE AND FULL ICING DOOR.

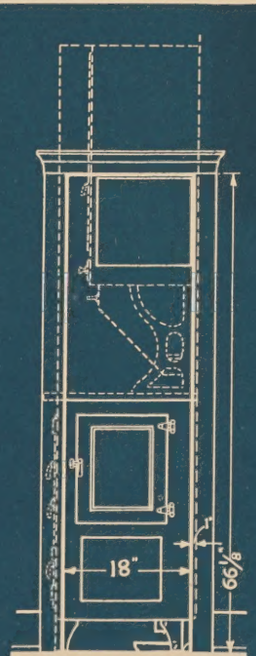

SIDE OR REAR FULL SIZE SERVICE AND ICING DOOR SHOWING "W" SIDE METAL WALL COVERING DOOR OPENING.

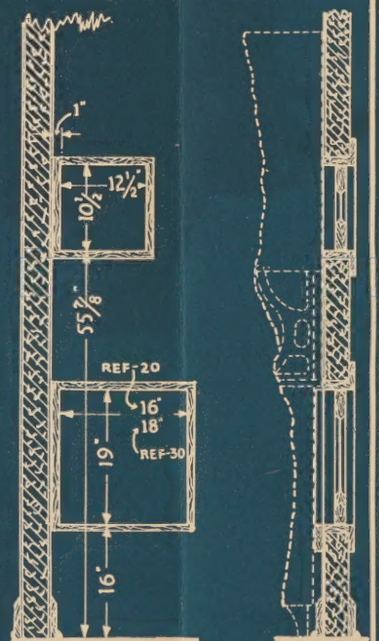

SIDE OR REAR SEPARATE SERVICE AND ICING DOOR.

THE ABOVE DOOR HEIGHTS ARE CORRECT MEASUREMENTS FOR EITHER UNIT REF-120 OR 130 WITH THE EXCEPTION OF ICING DOOR WIDTH.

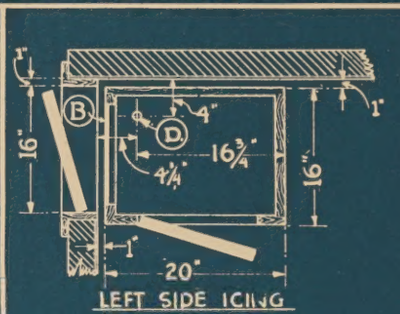

LEFT SIDE ICING

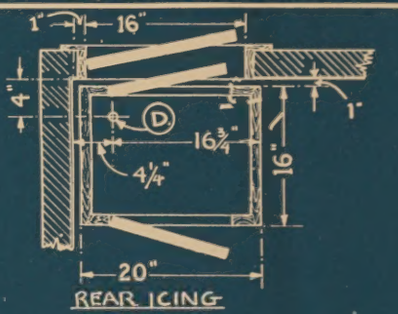

REAR ICING

FLOOR PLAN OF 20" REFRIGERATOR SECTION REF-20 FOR UNIT REF-120



RIGHT SIDE ICING



FRONT ICING

"B" SECTION REF-20 DROR DOOR ON SIDE ONLY. "D" (DRAIN LOCATION IN REFRIGERATOR ONLY
LOCATION OF DRAIN PIPE IN FLOOR MUST BE DETERMINED BY THE DESIGN AND SIZE OF DRAIN BOWL YOU CAN LOCATE BOWL EDGE 2" IN FROM OUTER EDGE OF REFRIGERATOR.

There's Only One "IN-A-DOR" Bed — The MURPHY

A Tribute to MURPHY *Equipment*

Here you will find an excellent example of how Murphy In-A-Dor Beds and Steel Kitchens can be used in Remodelling Work. These cozy and modern apartments were arranged in 2nd and 3rd floors formerly used for dance hall purposes.

Architects
BRADLEY & BRADLEY
Rockford, Illinois

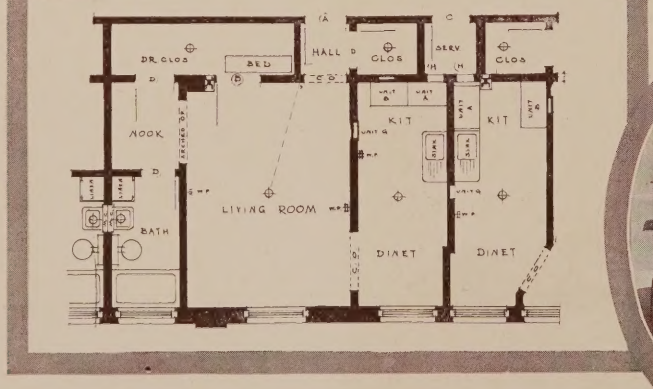

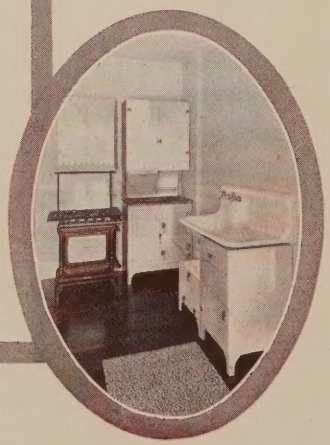

Murphy Equipment—In-A-Dor Beds, Steel Kitchen Units and Ironing Boards, are used in every Apartment. (Note attractive and compact Murphy Steel Kitchen to right).

Sanitary Assurance

Model "A"

Bath Room Cabinet

Model "A" is a recessed type. One-piece front face and back, steel or glass shelves. Finish: White or Gray—baked to permanent hardness in thermostatically controlled oven. Genuine plate glass mirror resting in a cushion setting. All hinges are interlocking, ball-tipped Face Dimensions: Height (front) 24⅝", width (front) 20½", inside depth, 4½". Mirror exposed surface, 13¼" x 17¼". Roughing in dimensions: Width, 17½"; height, 21½"; depth, 4"; Shipping weight, 45 lbs.

NOTE:—For detail drawing of Model "A" see Blueprint—PLATE No. 10—the next folded page.

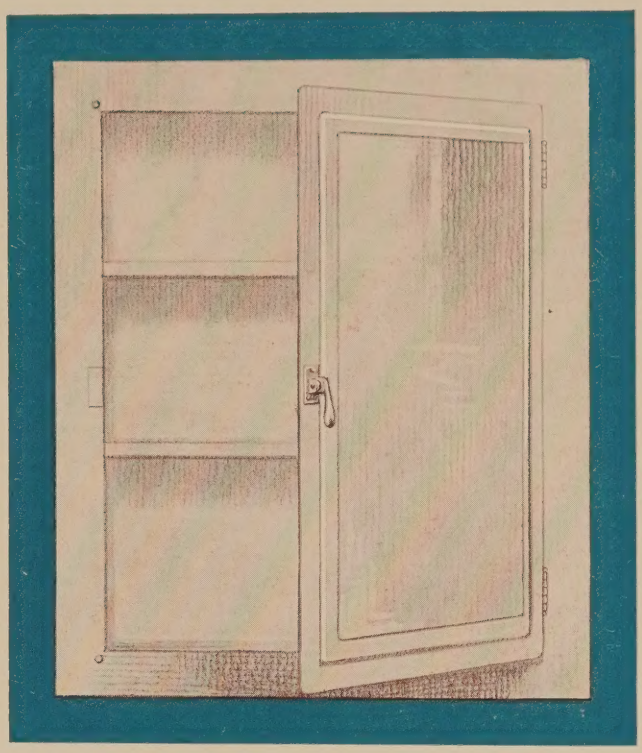

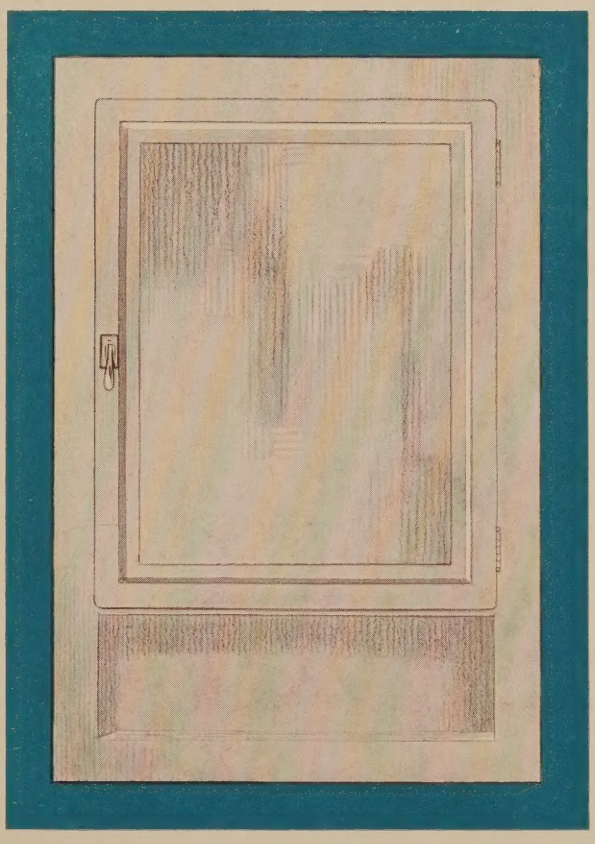

Imitated! but not Equalled

Model "B"

Bath Room Cabinet

Model "B" is a recessed type, open bottom shelf. Finish: White enamel, baked to permanent hardness in thermostatically controlled oven. Rust resisting hardware. Steel or glass shelves. Strike plate and two slightly protruding buttons prevent door from marring body. Cabinet face, one piece. Face dimensions: Height (front) 30⅝", width (front) 20½". Inside depth, 4½". Mirror exposed surface, 13¼" x 17¼". Roughing in dimensions: Width, 17½"; height, 27½"; depth, 4". Shipping weight, 60 lbs.

NOTE:—For detail drawings of Model "B" see Blueprint—PLATE No. 10—the next folded page.

"Built to Endure"

MURPHY DOOR BED CO.

TECHNICAL DEPT *PLATE 9.*

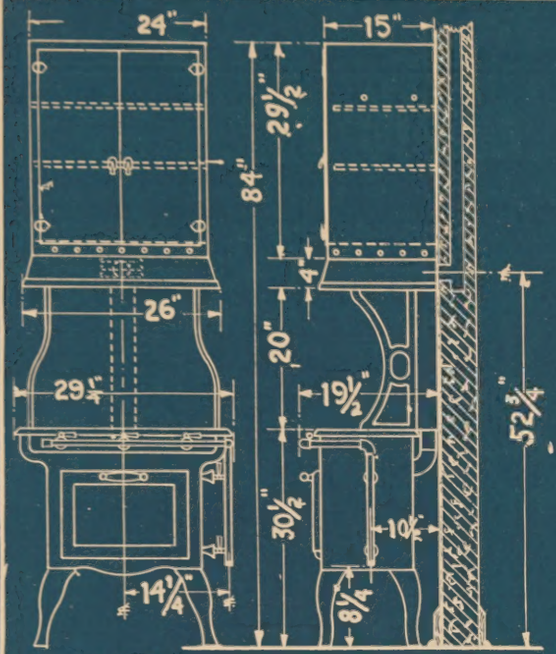

UNIT S.T. 30. THREE BURNER STOVE.
NOTE: SHOWING HEIGHT OF VENT AND LOCATION OF GAS RISER.

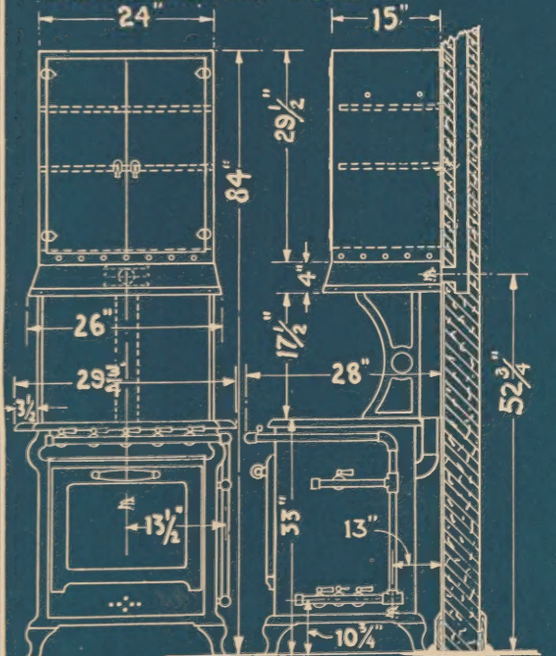

UNIT S.T. 40. FOUR BURNER STOVE
NOTE: SHOWING HEIGHT OF VENT AND LOCATION OF GAS RISER.

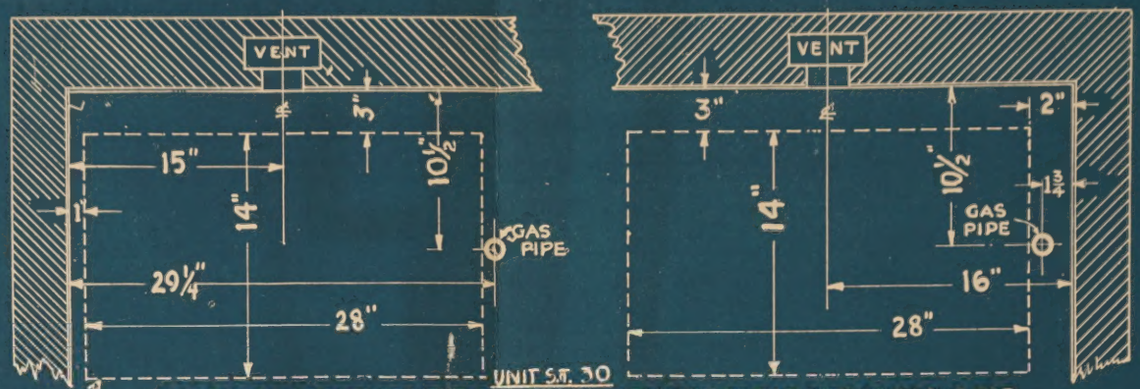

UNIT S.T. 30

FLOOR PLAN LOCATING VENT CENTER AND LOCATION OF GAS PIPE ON STOVE FOR EITHER RIGHT OR LEFT HAND CORNER.

DOTTED LINE INDICATES STOVE SIZE.

DETAIL OF VENT THIMBLE SHOWING THE POSSIBLE RANGE OF THIMBLE MOVEMENT WHICH CONNECTS TO FLUE, ALSO SHOWING THE LOUVERS WHICH ARE LOCATED UNDER CANOPY.

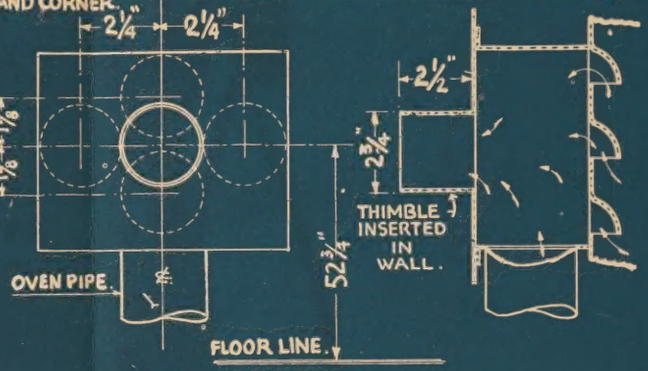

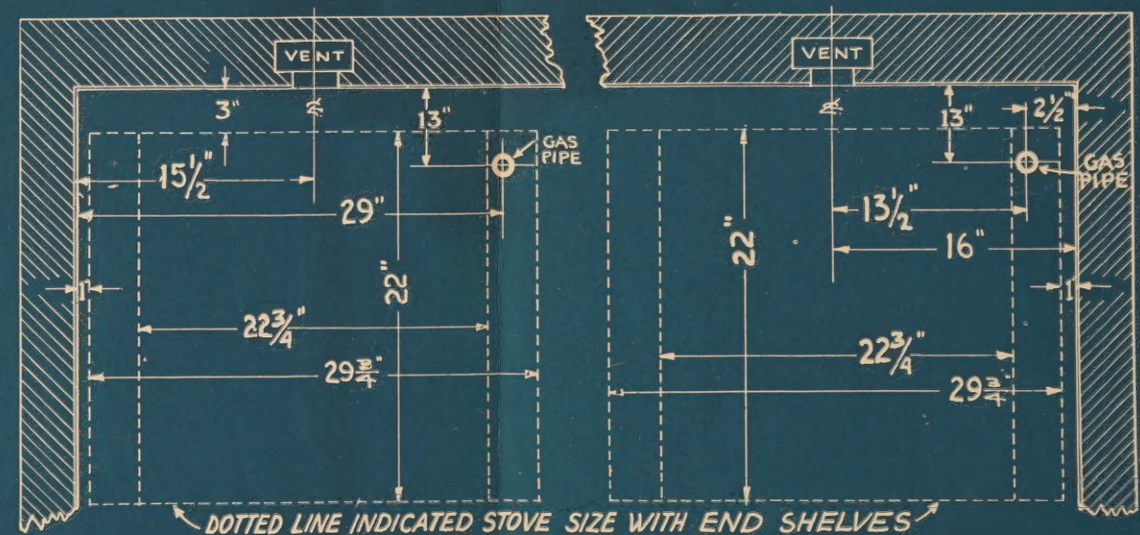

DOTTED LINE INDICATED STOVE SIZE WITH END SHELVES
UNIT S.T. 40.

FLOOR PLAN LOCATING VENT CENTER AND LOCATION OF GAS PIPE ON STOVE FOR EITHER RIGHT OR LEFT HAND CORNER.

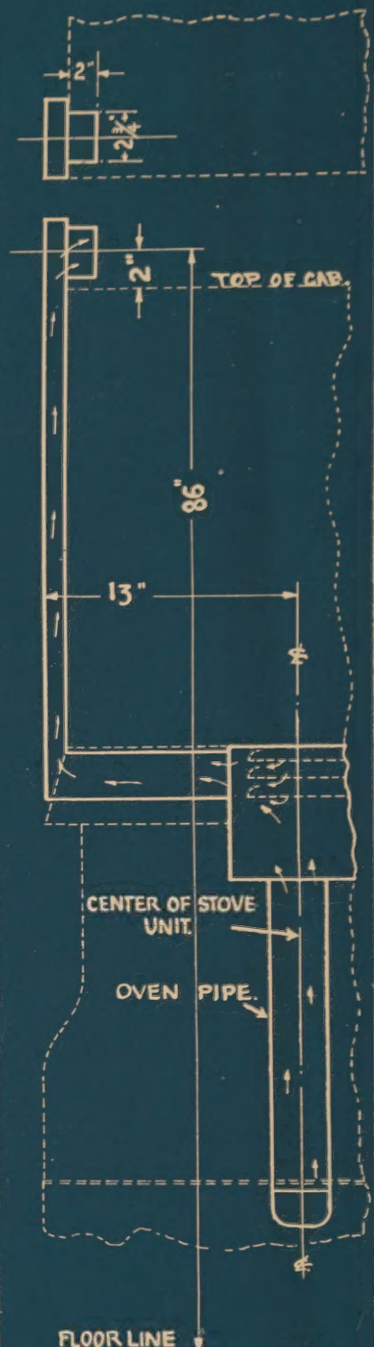

SPECIAL VENTING FEATURE. DRAWING SHOWS BACK VIEW OF STOVE UNIT WITH EITHER RIGHT OR LEFT, SIDE OR TOP VENT OUTLET.

There's Only One "IN-A-DOR" Bed — The MURPHY

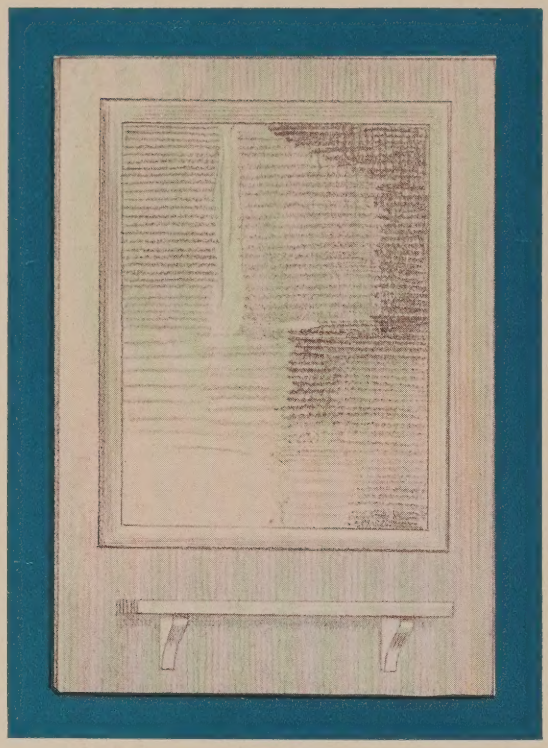

Another Popular Hotel Feature

Model "W"

Wall Mirror

Model "W"—The Wall mirror designed especially for hotels, has large steel shelf on brackets, plate glass shelf can be furnished. Model "W" Wall mirror is mounted with screws in side flanges of the frame, to two strips, ¾" x 2", which have been fastened to wall. Face dimensions: Height, (front) 27"; width, (front) 18¾". Mirror exposed surface, 13¼" x 17¼". Finish: White or French gray baked enamel. Shipping weight, 25 lbs.

NOTE:—For detail drawing of Model "W" see Blueprint PLATE No. 10—the next folded page.

Good Judgment and Strict Economy

Model "F"

Mirror and Toilet Niche

This unit serves as a shaft door and allows access to pipe and wire shaft. The door is supported by steel casing.

Finish: White enamel, baked to permanent hardness. Rust resisting hardware. Cabinet face, one piece. Height, (front) 33⅝"; width (front) 23½". Roughing in dimensions: 30⅝" high, 4½" deep, 20½" wide. Mirror exposed surface, 13¼" x 17¼". Shipping weight, 80 lbs.

NOTE:—For detail drawings of Model "F" see Blueprint PLATE No. 10—the next folded page.

"Built to Endure"

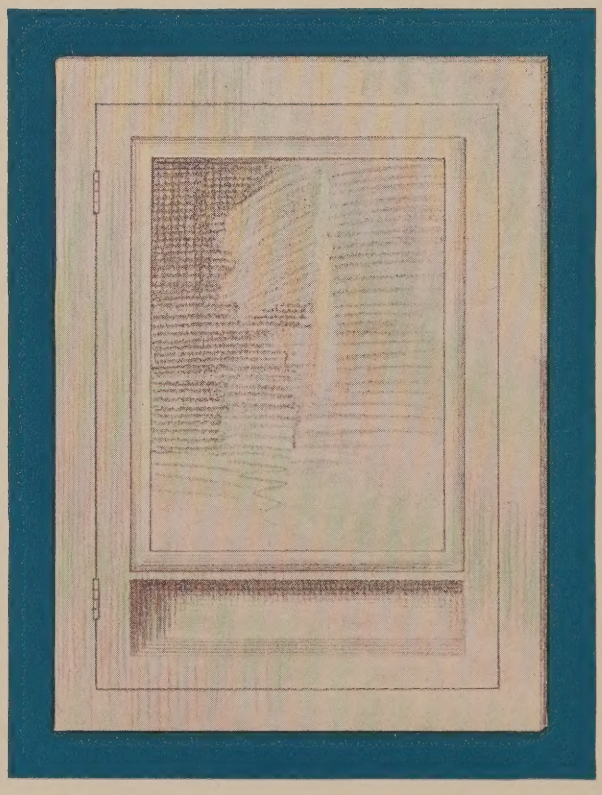

A MURPHY EQUIPPED KITCHEN

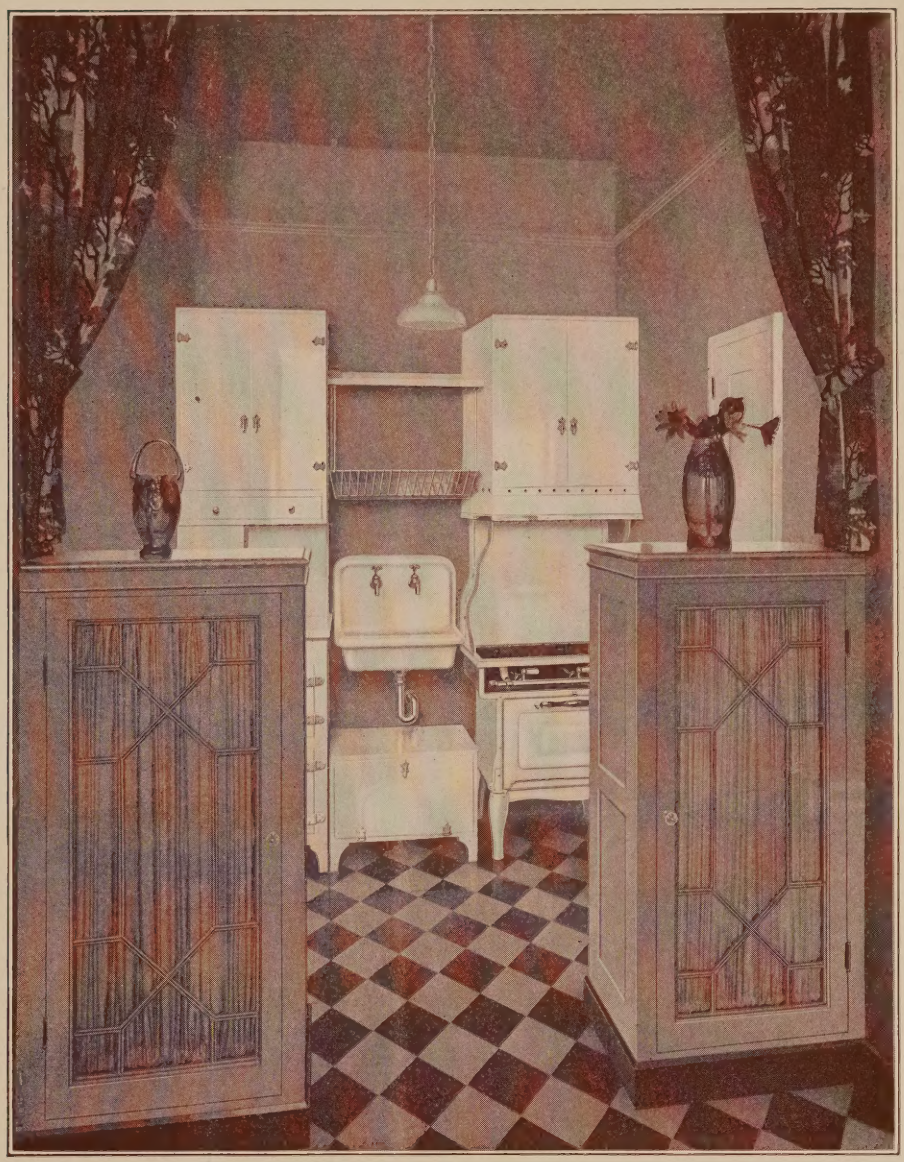

GOOD TASTE predominates in kitchens equipped with Murphy Steel Furniture. Carefully planned and designed Murphy Kitchen Units are the key to better home and apartment construction. The different designs and sizes will harmonize with all styles of architecture, giving tenants a convenient and restful place to work. No matter whether the home or apartment be large or small, elaborate or simple, all owners want attractive equipment. We exercise the greatest of care to maintain the Murphy high standard of quality—because we know that efficient permanent steel equipment will help to increase the present high standing of Murphy Products. Satisfied tenants are the greatest asset the owner of today can have—nothing placed in his houses or apartments will do more to bring about "Tenant Satisfaction" and insure rental profits than Murphy Steel Furniture.

MURPHY DOOR BED CO.

TECHNICAL DEPT *PLATE 10.*

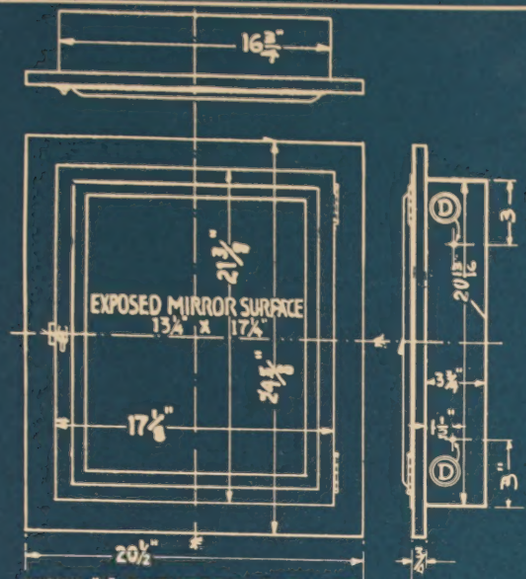

MODEL "A" BATHROOM CABINET.
RECESSED TYPE.
"D" CABINET IS INSTALLED WITH FOUR WOOD SCREWS FROM INSIDE.

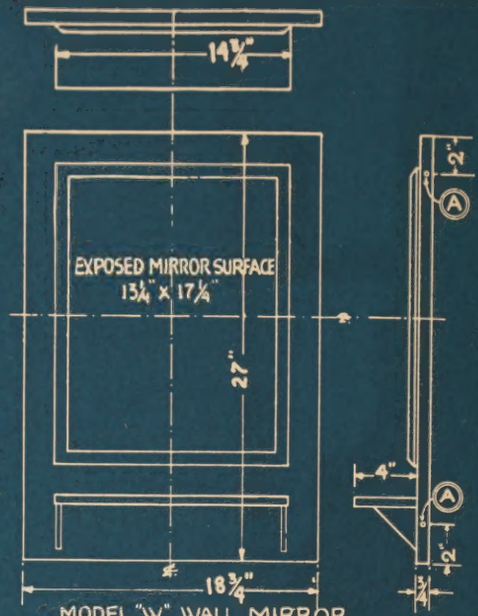

MODEL "W" WALL MIRROR.
CAN BE MOUNTED ON SURFACE OF WALL BY FASTENING TWO ¾ x 2" STRIPS OF WOOD ACROSS MIRROR FLANGE OPPOSITE "A".

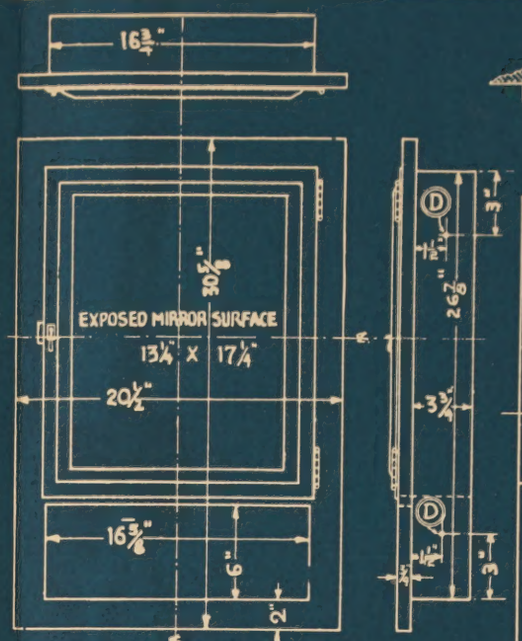

MODEL "B" BATHROOM.
CABINET RECESSED TYPE.
"D" CABINET IS INSTALLED WITH FOUR WOOD SCREWS FROM INSIDE.

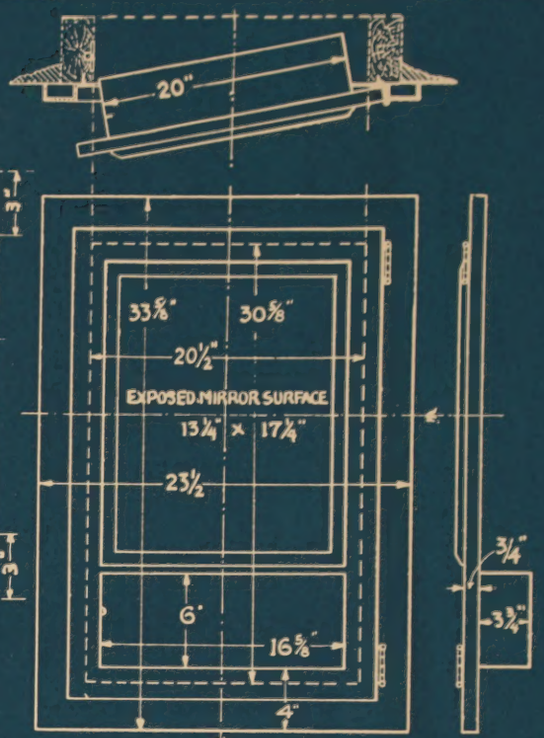

MODEL "F" BATHROOM CABINET.
USED ESPECIALLY FOR PIPE AND WIRE SHAFT.

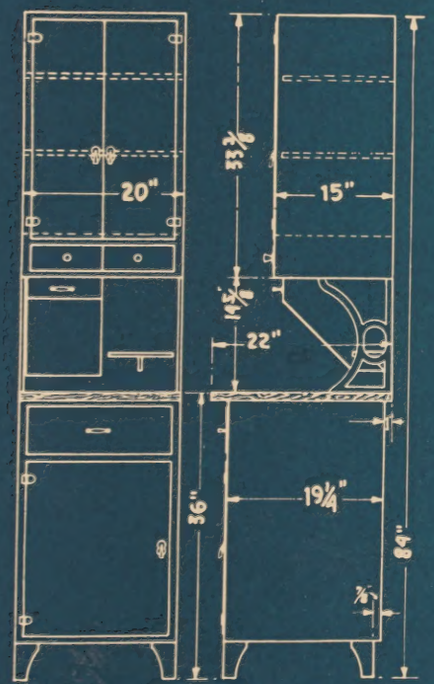

UTILITY UNIT RU-220.
NOTE:- SERVICE COMPARTMENT CAN BE FURNISHED SAME AS REFRIGERATOR UNIT UPPER CABINET

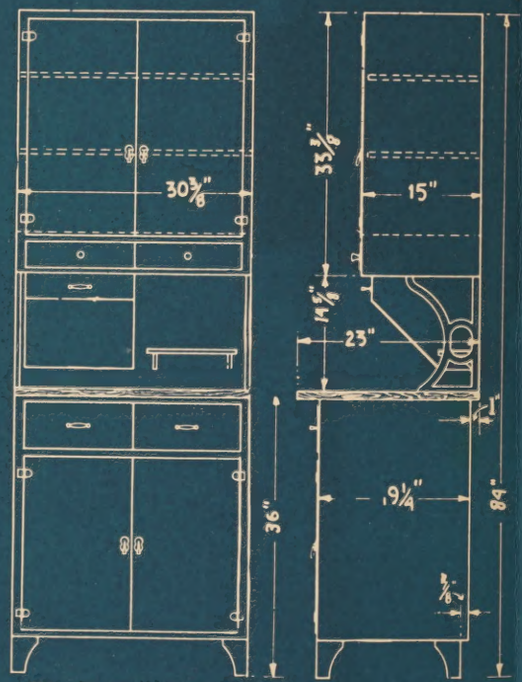

UTILITY UNIT RU.230.
NOTE:- SERVICE COMPARTMENT CAN BE FURNISHED SAME AS REFRIGERATOR UNIT UPPER CABINET

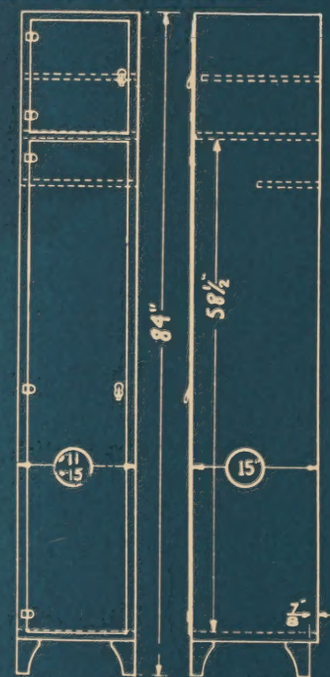

UNIT B.M. BROOM CABINET.
NO. 11, 11" WIDE.
NO. 15, 15" WIDE.
NOTE:- KINDLY SPECIFY RIGHT OR LEFT HAND DOOR.

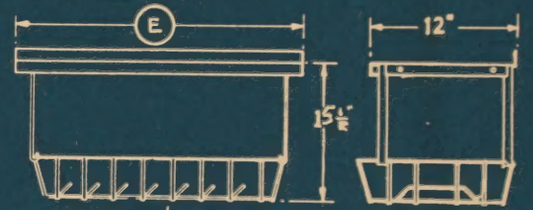

UNIT S.D.B. SHELF AND DRAIN BASKET
NOTE:- IMPORTANT, SPECIFY SINK SIZE. STANDARD SHELF "E" LENGHTS 19½", 21½", 25½".

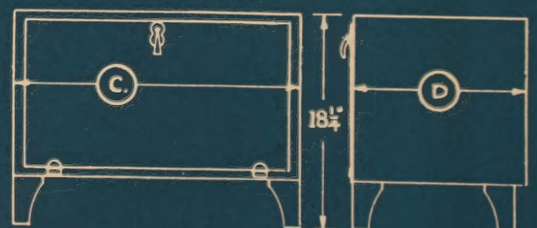

UNIT P.C. PAN CABINET.
SIZE:- FOR REFRIGERATOR UNIT REF-120. 15" DEEP FOR REFRIGERATOR UNIT REF-130. "D" 19¼" DEEP STANDARD WITH "C", 17", 19", 23", 26¼".

There's Only One "IN-A-DOR" Bed — The MURPHY

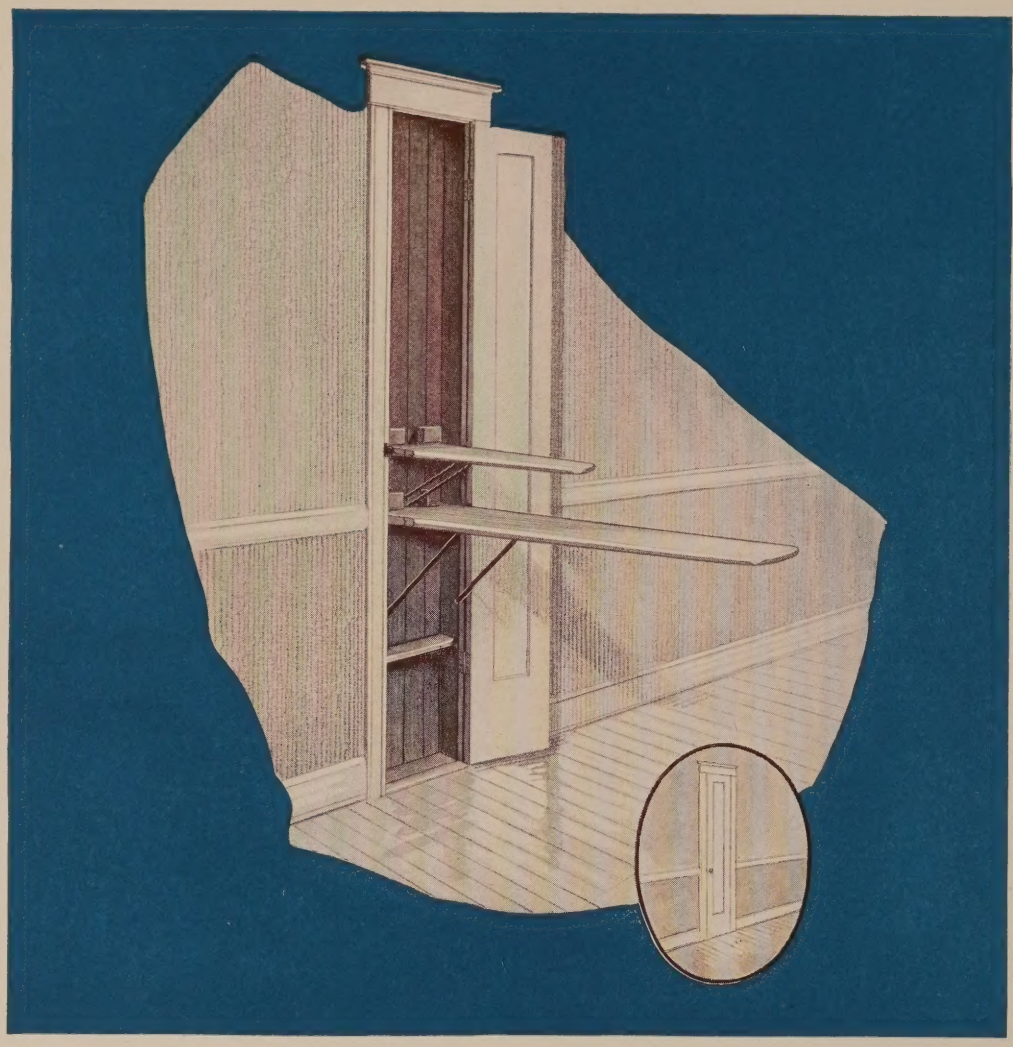

The Murphy Cabinet Ironing Board

A Deciding Factor Among Housewives when Renting

AS THE deciding factor in either the buying of a home or the renting of an apartment, modern housewives have been responsible for the fast growing popularity of the Murphy Cabinet Ironing Board. It is a built-in unit that when not in use can be neatly concealed without danger of its falling on toes or being in the way. It can be installed in any ordinary wall where either 3″ or 4″ studding is used, between studding 16″ on center. The operating mechanism is constructed of galvanized steel rods which insures ease of operation and durability. It allows the drawing of a sheet or any other garment around the board for its full length. We furnish the door and cabinet assembled in the natural wood only, so that it can be finished to suit. We do not furnish any door casings, door cap or any hardware. See detailed specifications and installation drawings to the right.

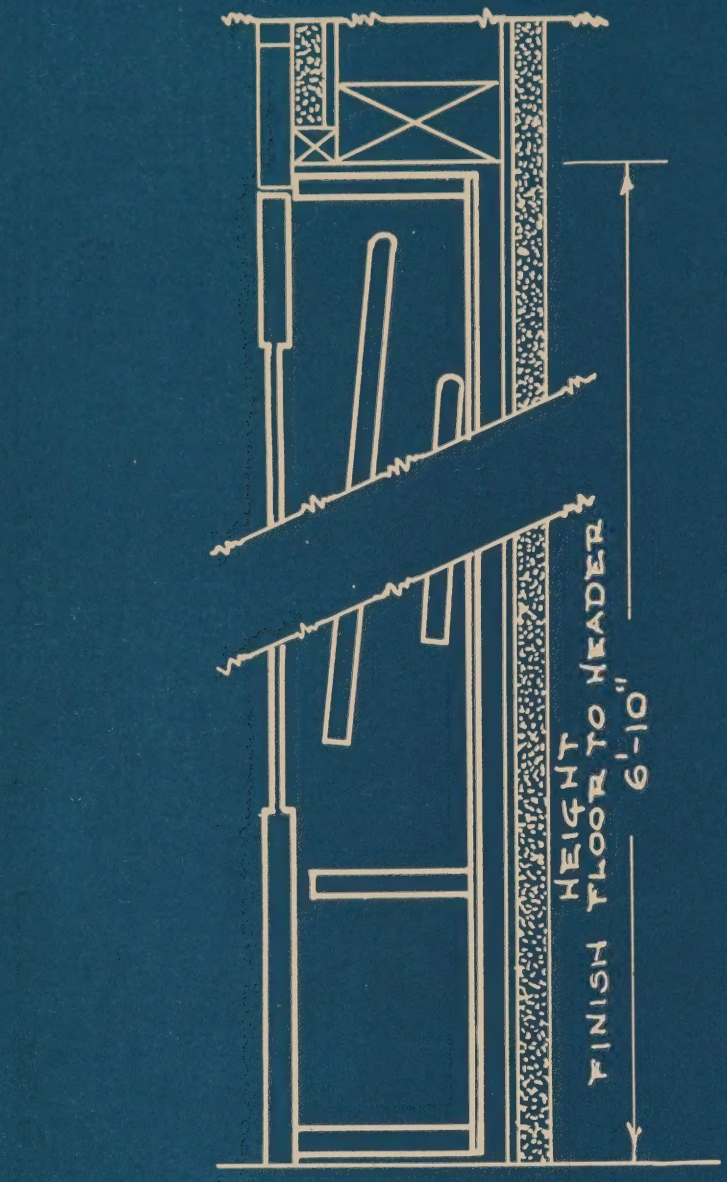
HEIGHT FLOOR TO HEADER
6'-10"
FINISH

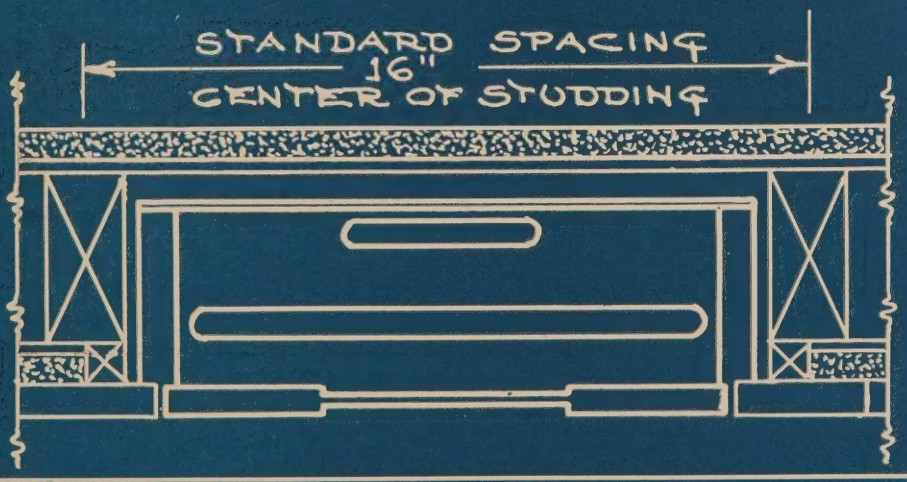
STANDARD SPACING
16"
CENTER OF STUDDING

A Tribute to MURPHY Equipment

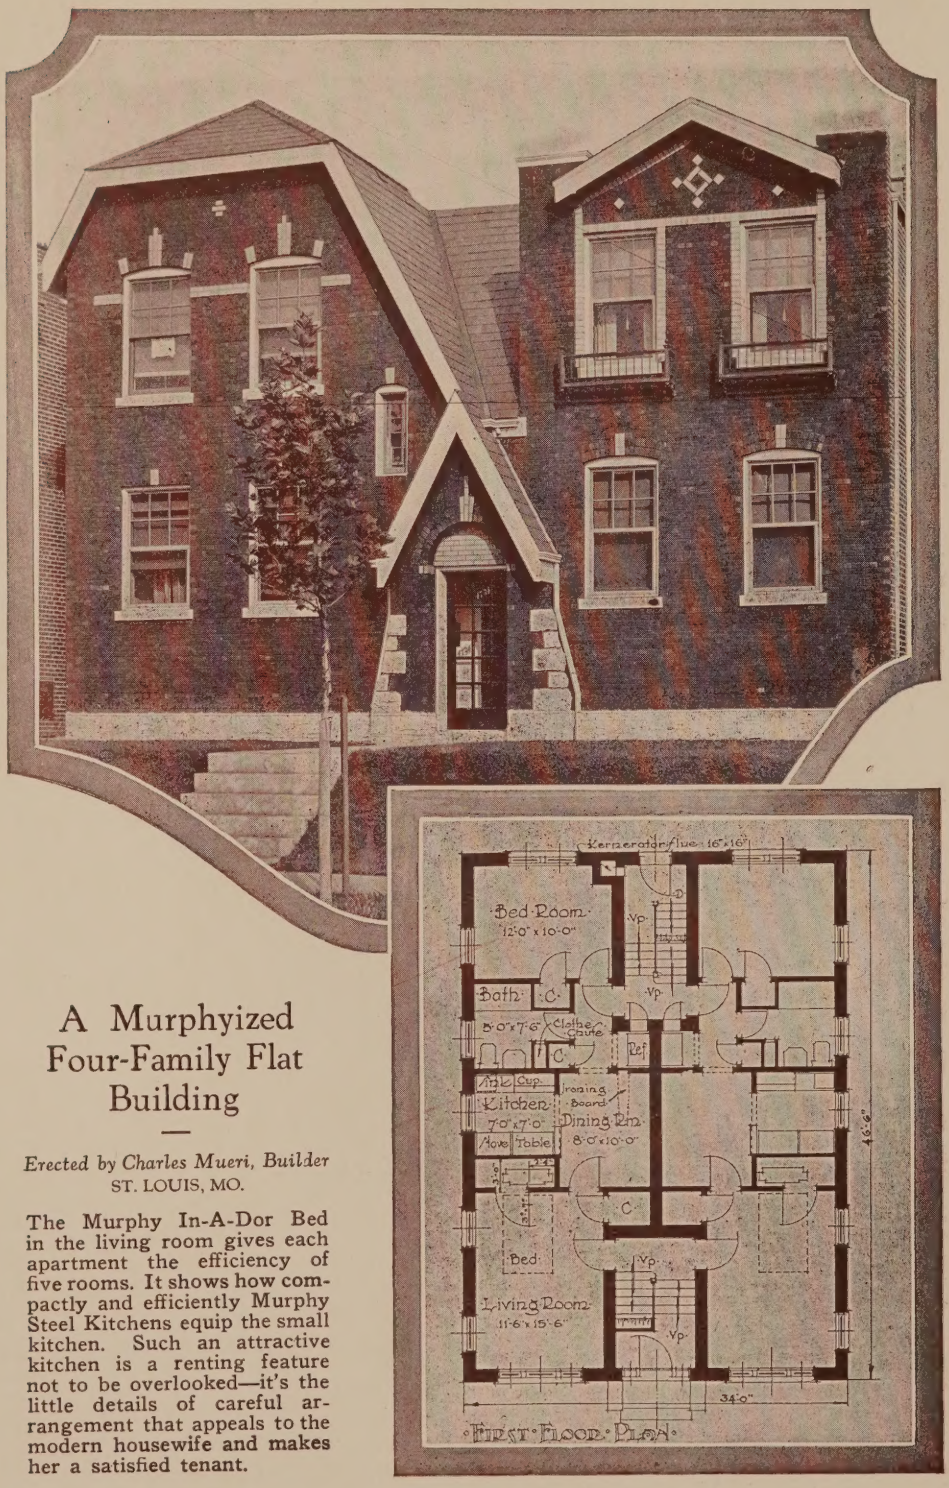

A Murphyized Four-Family Flat Building

Erected by Charles Mueri, Builder
ST. LOUIS, MO.

The Murphy In-A-Dor Bed in the living room gives each apartment the efficiency of five rooms. It shows how compactly and efficiently Murphy Steel Kitchens equip the small kitchen. Such an attractive kitchen is a renting feature not to be overlooked—it's the little details of careful arrangement that appeals to the modern housewife and makes her a satisfied tenant.

AVERY LIBRARY
COLUMBIA UNIVERSITY

AT
940
M952
1925

BERKELEY BUILDING
19 West 44th St.
NEW YORK CITY / NEW YORK